



-40° TO +70°



INCLUDED



802.3at



802.3af/at



IP67



2



The NetWave® industrially hardened wireless dual radio Ethernet transmission device is designed to be used with an external antenna and is used for **redundant ring and drop & repeat topologies**. Both radios can be configured through the embedded User Interface as a Client or as an Access Point. Radio 2 supports 5GHz operation and is connected to the 19dBi internal antenna. Radio 1 is user selectable for 5GHz or 2.4GHz and connects to an external antenna. The NW8 and NW8E support up to 145Mbps throughput using MIMO technology. The units can be powered by an IEEE 802.3af/at PoE compliant device or through a supplied power injection module with the second Ethernet port operational as an IEEE802.3at PoE power source. The NW8 is FCC certified for use in North America and the NW8E is ETSI, DFS and TPC certified for use in the European Union. The NW8/RU is for use in Russia.

FEATURES

- › Lifetime Warranty
- › IEEE802.3at PoE Compliant PD and PSE
- › Over current protection and 3 layers of Ethernet surge suppression on the PD port
- › 802.11a/n Compliant
- › Distances up to 2 mi (FCC) or 2 km (ETSI)
- › Environmentally Hardened -40° to +70°C
- › Meets class IP67 dust and water immersion protection standards
- › ETSI Standards (EU Region only):
 - DFS Dynamic Frequency Selection
 - TPC Transmit Power Control
- › Gigabit IEEE 802.3at 35W PoE+ Injector (included)
- › Secure transmission: WPA2 - AES or TKIP encryption
- › ComNet Antenna alignment feature eases installation and setup
- › RF Spectrum Survey Tools
- › Antenna Alignment Tools
- › LED array displays unit operational status along with received signal strength

APPLICATIONS

- › Installations that require redundant ring or linear drop and repeat topologies
- › Ideal for PoE Camera connectivity
- › Installations that require connecting to more than one Ethernet device
- › Simple to deploy and cost-effective alternative to physical connections to Ethernet edge equipment
- › Integration of Ethernet where right-of-way issues mandate wireless communications
- › ITS traffic signalization networks and Video Detection Systems (VDS)
- › ITS roadside and city center CCTV surveillance, and surveillance of high-value or mission-critical assets
- › Wireless communications in manufacturing, petrochemical refineries, wastewater treatment facilities, and other industrial automation and control applications operating in harsh or out-of-plant environments
- › Electrical substation video and perimeter surveillance

SPECIFICATIONS

2.4GHz Wireless Radio (NW8 and NW8E only)

EIRP	NW8 (FCC): +4dBm to +17dBm, or +4dBm to +26dBm with MAC-lock enabled NW8E (ETSI): +20dBm +23dBm Rated Transmitter
RF Output	
Operational Frequency	NW8: (FCC) 2412 – 2462MHz NW8E: (ETSI) 2412 – 2472MHz
Bandwidths	10, 20, 20/40MHz

5GHz Wireless Radio

EIRP	NW8 (FCC): +35dBm/+45dBm with MAC-lock enabled NW8E (ETSI): +30dBm NW8/RU (Russia): +30dBm +26dBm Rated Transmitter (NW8/RU Output Power 100mW)
RF Output	
Operational Frequency	5180MHz – 5825MHz, Region-dependent. Not all frequencies are supported in all regions. Contact ComNet for frequencies supported in your region. NW8/RU: 5190-5330MHz and 5660-5710MHz
Bandwidths	10, 20, and 40MHz

Internal Antenna (Connected to Radio 2)

Antenna	Internal 19dBi Dual Polarized Directional
Gain	19dBi
Azimuth	17° Horizontal/Vertical
Elevation	17° Horizontal/Vertical

Connectors

Gigabit Ethernet	2 × RJ-45, Sealed Cable Gland
External Antenna (Radio 1)	2 × N-Type 50 ohm

Software Features

Addressing	Static IP / DHCP Client / DHCP Server
SNMP	V2c
Spanning Tree Protocol support	
Telnet Server	
Syslog	
802.1x Port-Based Network Access Control	
NTP Client	
User-Configurable Watchdog and Auto-Reboot Mechanism	
Multi-Level Configuration and Monitoring Login Accounts	
User Configurable Long Range Parameters	

Power

Operating Power	48 to 57 VDC @ 100mA
Power Consumption	4.8 W
PD Power	IEEE802.3af/at PD compliant
PSE Power	IEEE802.3at PSE compliant

Mechanical

Indicating LEDs	Power On Ethernet Link Signal Strength LAN port
Size (L × W × H)	10.0 × 10.0 × 3.4 in (25.7 × 25.7 × 8.6 cm)
Shipping Weight:	<2 lb / 0.9 kg

Environmental

MTBF	>100,000 hours
Operating Temp	-40° C to +70° C
Storage Temp	-40° C to +85° C
Relative Humidity	5% to 95%




Low Power Consumption

ORDERING INFORMATION


Part Number	Description
NW8	Individual Hardened Dual Radio, Two Gb Ethernet Ports, One internal 19dBi 17° beamwidth directional antenna, includes power injection module, line cord and mounting assembly, Port 1 Supports 802.3at PD PoE Power, Port 2 provides IEEE802.3at PSE PoE Power, FCC certified for use in NA Region
NW8E	Individual Hardened Dual Radio, Two Gb Ethernet Ports, One internal 19dBi 17° beamwidth directional antenna, includes power injection module, line cord and mounting assembly, Port 1 Supports 802.3at PD PoE Power, Port 2 provides IEEE802.3at PSE PoE Power, ETSI certified for use in EU Region
NW8/RU	Individual Hardened Dual Radio, Two Gb Ethernet Ports, One internal 19dBi 17° beamwidth directional antenna, includes power injection module, line cord and mounting assembly, Port 1 Supports 802.3at PD PoE Power, Port 2 provides IEEE802.3at PSE PoE Power, for use in Russia
External Antenna Options	NWAVBS1 – External Dual Polarization 4.9-5.8GHz 16dBi Variable Beam Sector Antenna NWAODA1 – External Omni Directional Dual Band (2dBi@2.4GHz / 5dBi@5GHz) Antenna, N Type Connector, 45° and 90° Articulating Joint NWADA1 – External Dual Polarization 4.9-5.8GHz 19dBi 17° Beamwidth Directional Antenna
Included Accessories	Power Kit with IEEE 802.3at 35W PoE Injector and Region Specific Line Cord Mounting Hardware Kit (For Pole Mounting Only)
Options	NWBKT - Articulating Wall or Pole Mounting Kit. Supports up to 3 in/76 mm diameter poles. (Sold Separately) Add /IA870 for 8dBi/70° Internal Antenna

In a continuing effort to improve and advance technology, product specifications are subject to change without notice.

TYPICAL REDUNDANT RING TOPOLOGY APPLICATION

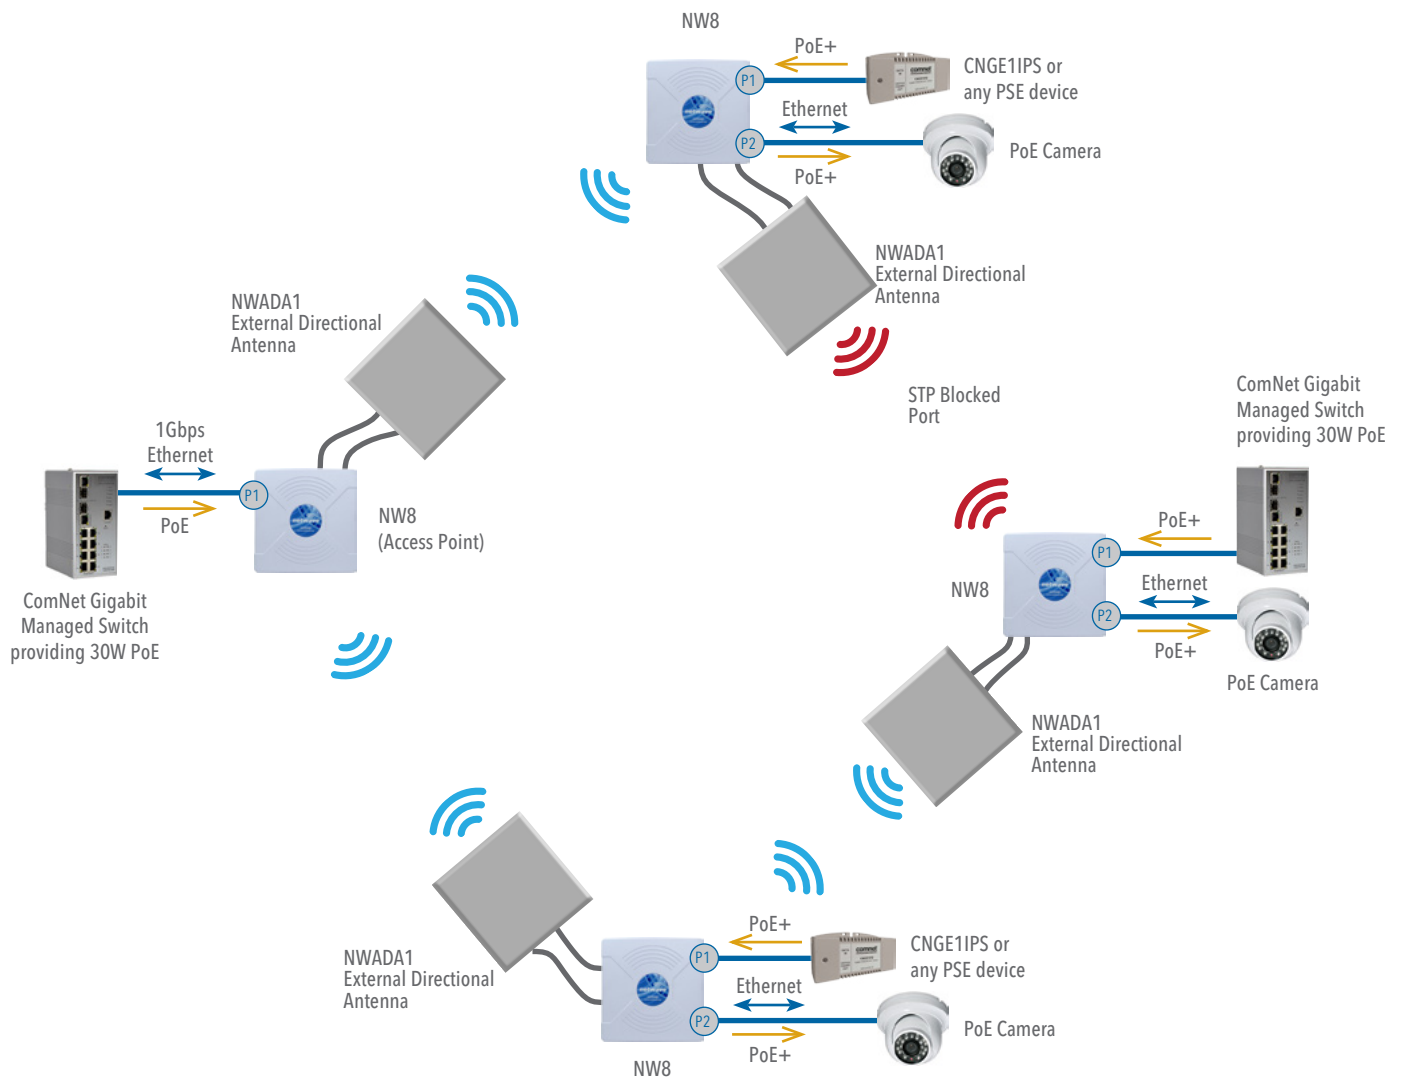

TYPICAL DROP-AND-REPEAT TOPOLOGY APPLICATION

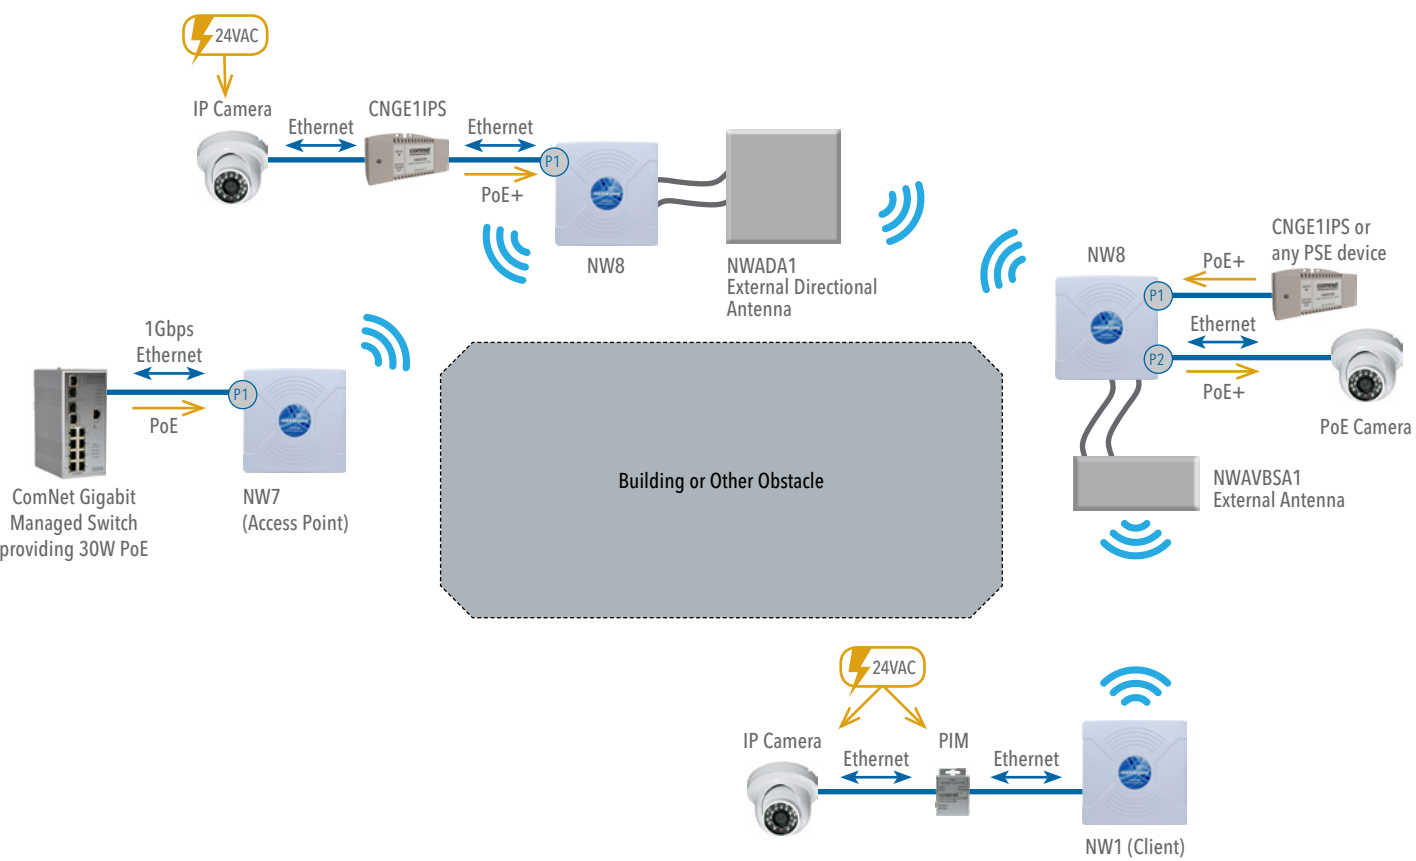

LEGEND

	WIRELESS		PORT 1 PD
	CAT5		PORT 2 PSE
	POWER		50Ω COAX
	ETHERNET		