

# EXP100 Expansion Module for use with FDW1000 Wiegand Module

**EXP100** Series





When used with the FDW1000 series of fiber optic Wiegand extender modules, the ComNet<sup>™</sup> EXP100 Expansion Module enables additional Wiegand-based devices to be added to the network. The 2-wire RS-485 data interface between the expansion modules provides a secure connection, with excellent immunity to electrical noise and interference. Up to 8 EXP100s can be used in a drop-and-repeat/daisy-chain topology, and each EXP100 may be set to a unique address (1 through 15) via DIP-switch selection. An auxiliary I/O (input/output) interface is available for ascertaining door, gate, and control panel status and signaling, and a relay interface provides the door strike or gate activation functions. The EXP100 is supplied as a remote unit for door or gate locations or a central unit for control panel installation. Packaged in a rugged aluminum housing, the EXP100 is designed for long-term, reliable operation in harsh industrial environments.

## **FEATURES**

- > RS-485 2-Wire Interface
- > Surge resistant
- > Wiegand-based reader formats/control panel-compatible
- > Secure operation
- Relay interface provides door strike or gate activation functions
- > Voltage transient protection on all power and signal input/ output lines provides protection from power surges and other voltage transient events.
- No in-field optical adjustments required
- LED fault-specific status indicator for rapidly determining the operating status of the extender and the link

- > IEEE 802.3 compliant
- Small size surface / shelf mount housing: Ideal for use in those installations where space is at a premium
- > Plug-and-play design ensures ease of operation
- > Made in the USA
- > Lifetime Warranty

## APPLICATIONS

 Drop-and-repeat/daisy-chain copper media extension of up to 8 gates, doors, and readers, when used with the ComNet FDW1000 Optical Wiegand Data Extender

# **EXP100 Expansion Module for use** with FDW1000 Wiegand Module

# **SPECIFICATIONS**

#### Data

Data	Interface
------	-----------

#### Power

Input Output RS-485, 2-Wire Reader - 0 - 30VDC LED - 0 - 30VDC Analog - 0 - 5VDC

8 - 16 VDC @ 200 mA Max +5 VDC @ 100 mA

### **Electrical & Mechanical**

Current Protection	Automatic Resettable Solid-State Current Limiters
Circuit Board	Meets IPC Standard
Size (L×W×H)	3.5 × 2.75 × 0.75 in (8.9 × 7.0 × 1.9 cm)
vironmental	
vironmentai	

Env

AGENCY COMPLIANCE

FC

PART 15 COMPLIANT

MTBF **Operating Temp** Storage Temp **Relative Humidity** 

(E

E322911


>100,000 hours -40° C to +80° C -55° C to +85° C 0% to 95% (non-condensing)<sup>1</sup>



## **ORDERING INFORMATION**

Part Number	Description
EXP100/C	Expansion Interface Module, Central Unit
EXP100/R	Expansion Interface Module, Remote Unit
Accessories Options	DC Plug-in Power Supply, 90-264 VAC, 50/60 Hz (Included) [1] Add '/C' for Conformally Coated Circuit Boards to extend to condensation conditions (Extra charge, consult factory)

# **TYPICAL APPLICATION**

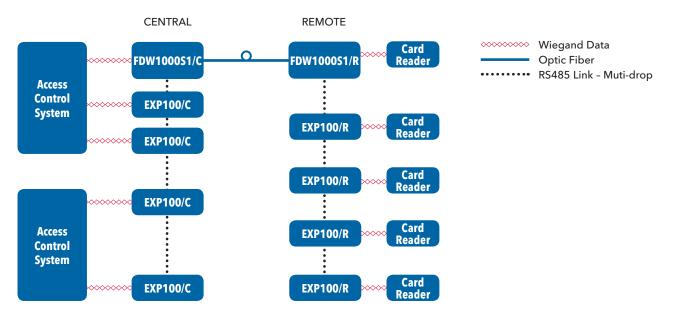



3 CORPORATE DRIVE | DANBURY, CONNECTICUT 06810 | USA | T: 203.796.5300 | F: 203.796.5303 | TECH SUPPORT: 1.888.678.9427 | INFO@COMNET.NET 8 TURNBERRY PARK ROAD | GILDERSOME | MORLEY | LEEDS, UK LS27 7LE | T: +44 (0)113 307 6400 | F: +44 (0)113 253 7462 | INFO-EUROPE@COMNET.NET © 2014 Communication Networks. All Rights Reserved. "ComNet" and the "ComNet Logo" are registered trademarks of Communication Networks. 20 Nov 2014