

8-channel digital video + 8 bi-directional data channels + 10-bit digital short-haul video



## Description

The ComNet FVT/FVR8018(M)(S)1 Series transmits eight (8) channels of 10-Bit Digital Video along with eight (8) channels of bi-directional data over one single mode or multimode optical fiber. The video quality exceeds RS-250C for short-haul video transmission. This equipment is environmentally hardened and suitable for use in unconditioned roadside or out-of-plant installations. The FVT/FVR8018 is compatible with NTSC, PAL and SECAM video transmission protocols and supports bi-directional RS232, 422 and RS485 (2 & 4 Wire) data. Plug-and-play design ensures ease of installation and no electrical or optical adjustments are required.

Bi-Color (RED/GREEN) LED indicators are provided to indicate the status of the system, video and data. Packaged in the exclusive ComNet ComFit housing, these units may be either wall or rack-mounted, or may be DIN-rail mounted by the addition of ComNet model DINBKT1 adaptor plate.

## Applications

- High-Performance CCTV (Fixed Video)

## Features

- 10-bit digital video transmission: transmits 8 real-time color video signals and 8 bi-directional data signals on one optical fiber
- Supports RS232, RS422, and 2 or 4-wire RS485
- Exceeds all requirements for EIA RS-250C short-haul transmission
- Compatible with all NTSC, PAL, or SECAM CCTV camera systems
- Tested and certified by an independent laboratory for full compliance with the environmental requirements (ambient operating temperature, mechanical shock, vibration, humidity with condensation, high-line/low-line voltage conditions and transient voltage protection) of NEMA TS-1/TS-2 and the Caltrans Specification for Traffic Signal Control Equipment.
- Voltage transient protection on all power and signal input/output lines provides unconditional protection from power surges and other voltage transient events.
- Robust design ensures extremely high reliability in unconditioned out-of-plant environments
- Bi-color (Red/Green) LED status indicators provide rapid indication of critical operating parameters
- Hot-swappable rack modules
- Interchangeable between stand-alone or rack mount use
  - ComFit
- Lifetime Warranty



specifications

VIDEO

Video Input: 1 volt pk-pk (75 ohms)  
 Overload: >1.5V pk-pk  
 # Input/Output Channels: 8  
 Bandwidth (minimum): 10 Hz - 6.5 MHz per channel  
 Differential Gain: <2%  
 Differential Phase: <0.7°  
 Tilt: <1%  
 Signal-to-Noise Ratio (SNR): 67 dB Typical  
 Max. RG-59 COAX Distance: 100m (300ft) Camera to Fiber Optic Module to maintain 6Mhz Bandwidth

DATA

Data Channels: 8  
 Data Interface: RS232, RS422 and RS485 (2W/4W)  
 Data Format: NRZ, NRZI, Manchester, Bi-Phase and Sensornet  
 Data Rate: DC-250 Kbps (NRZ)  
 Bit Error Rate: <1 in 10<sup>-9</sup> @ Maximum Optical Loss Budget  
 Operating Mode: Simplex or Full-Duplex

WAVELENGTH

1310/1550 nm, Multimode and Single Mode

NUMBER OF FIBERS

1

LED INDICATORS

- Video Sync Presence for Each Video Channel
- Received Data - Transmitted Data
- Optical Carrier Detect

OPTICAL EMITTER

Laser Diode

CONNECTORS

Optical: ST  
 Power: Terminal Block  
 Video: BNC (Gold Plated Center-Pin)  
 Data: RJ45 (5 pcs. Included)

ELECTRICAL & MECHANICAL

Power: 8-15 VDC @ 4W  
 Surface Mount: From Rack  
 Rack Mount: 3  
 Number of Rack Slots: Automatic Resettable Solid-State Current Limiters  
 Current Protection: Meets IPC Standard

Circuit Board: 6.1 × 5.3 × 3.3 in., (15.5 × 13.5 × 8.3 cm)  
 Size (in./cm) (L×W×H)  
 Shipping Weight: <2 lb./0.9 kg

ENVIRONMENTAL


MTBF: >100,000 hours  
 Operating Temp: -40° C to +75° C  
 Storage Temp: -40° C to +85° C  
 Relative Humidity: 0% to 95% (non-condensing)\*  
 \* May be extended to condensation conditions by adding suffix '/C' to model number for conformal coating.



PART NUMBER	DESCRIPTION	FIBERS REQUIRED	FIBER	OPTICAL PWR BUDGET	MAX. DISTANCE†	# RACK SLOTS
FVT8018M1	Video Transmitter/Data Transceiver (1310/1550 nm)	1	Multimode 62.5/125µm	16 dB	2 km (1.2 miles)	3
FVR8018M1	Video Receiver/Data Transceiver (1550/1310 nm)					
FVT8018S1	Video Transmitter/Data Transceiver (1310/1550 nm)	1	Single Mode 9/125µm	16 dB‡	48 km (30 miles)	3
FVR8018S1	Video Receiver/Data Transceiver (1550/1310 nm)					
Accessories	9 Volt DC Plug-in Power Supply, 90-264 VAC, 50/60 Hz (Included) (5) RJ45 - RJ45 Breakout Wiring Kit (Includes cable and terminal block)					
Options	Add '/C' for Conformally Coated Circuit Boards (Extra charge, consult factory) DIN-Rail Mounting Adaptor Plate Kit – With mounting hardware (Optional, order model DINBKT1)					

NOTE: This product requires a fiber installation with a minimum 30 dB connector return loss. The use of Super Polish Connectors is recommended.  
 † Distance may be limited by optical dispersion. High bandwidth 50/125µm fiber is required to achieve maximum multimode distance. Contact ComNet tech support before using these units for distances greater than 2 km. ‡ Add "HP" to model number for 23dB

Complies with FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J. In a continuing effort to improve and advance technology, product specifications are subject to change without notice.

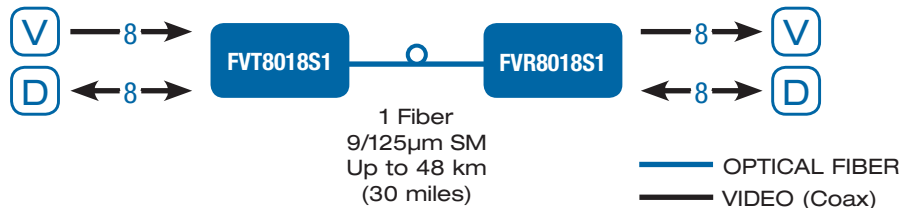

3 CORPORATE DRIVE | DANBURY, CT 06810 | USA  
 T: 203.796.5300 | F: 203.796.5303 | TECH SUPPORT: 1.888.678.9427 | INFO@COMNET.NET  
 8 TURNBERRY PARK ROAD | GILDERSOME | MORLEY | LEEDS, UK LS27 7LE  
 T: +44 (0)113 307 6400 | F: +44 (0)113 253 7462 | INFO-EUROPE@COMNET.NET