



INCLUDED




-40° TO +75°C



8



12

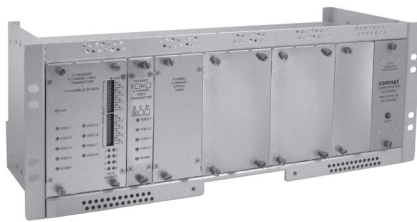

The ComNet™ FVT/FVR120D8 series video transmitter/data transceiver and video receiver/data transceiver series utilize 10-bit digital encoding and decoding for high-quality video transmission that exceeds the requirements of EIA RS-250C for short-haul video transmission. These environmentally hardened units provide transmission of 12 independent video channels and eight bi-directional data channels over one optical fiber and are ideal for use in unconditioned roadside or out-of-plant installations. These units are completely transparent to and universally compatible with any NTSC, PAL, or SECAM CCTV camera systems, data channels can be set independently for RS232, RS422 and 2 or 4-wire RS485, Sensornet, Bi-phase and Manchester. Plug-and-play design ensures ease of installation and no electrical or optical adjustments are ever required.

## FEATURES

- › 10-Bit digitally encoded video transmission, transmits 12 real-time/full frame color video signals and 8 bi-directional data signals on one optical fiber
- › Supports RS232, RS422, and 2 or 4-wire RS485, Sensornet, Bi-phase and Manchester
- › Exceeds all requirements for EIA RS-250C short-haul transmission: Extremely high video performance
- › Exceptionally low video distortion with zero Performance Variation vs. Optical Path Loss
- › Compatible with all NTSC, PAL, or SECAM CCTV camera systems
- › Designed to meet full compliance with the environmental requirements (ambient operating temperature, mechanical shock, vibration, humidity with condensation, high-line/low-line voltage conditions and transient voltage protection) of NEMA TS-1/TS-2 and the Caltrans Specification for Traffic Signal Control Equipment.
- › Voltage transient protection on all power and signal input/output lines provides protection from power surges and other voltage transient events.
- › Robust design ensures extremely high reliability in unconditioned out-of-plant environments
- › Bi-color (Red/Green) LED status indicators provide rapid indication of critical operating parameters
- › Lifetime Warranty

## APPLICATIONS

- › High-Performance CCTV Systems

**SPECIFICATIONS**

**Video**

Video Input	1 volt pk-pk (75 ohms)
Overload	>1.5 V pk-pk
# Input/Output Channels	12
Bandwidth (minimum)	10 Hz - 6.5 MHz per channel
Differential Gain	<2%
Differential Phase	<0.7°
Tilt	<1%
Signal-to-Noise Ratio (SNR)	67 dB Typical
Max. RG-59 COAX Distance	100m (300 ft) Camera to Fiber Optic Module to maintain 6 Mhz Bandwidth

**Data**

Data Channels	8
Data Interface	RS232, RS422 and RS485 (2W/4W)
Data Format	NRZ, NRZI, Manchester, Bi-Phase and Sensornet
Data Rate	DC-250 Kbps (NRZ)
Bit Error Rate	<1 in 1010 @ Maximum Optical Loss Budget
Operating Mode	Simplex or Full-Duplex

**Wavelength**

Multimode and Single Mode

**Number of Fibers**

1

**LED Indicators:**

- > Video Sync Presence for Each Video Channel
- > Received Data > Transmitted Data
- > Optical Carrier Detect > Power

**Optical Emitter**

Laser Diode

**Connectors**

Optical	ST
Power	Terminal Block
Video	BNC (Gold Plated Center-Pin)
Data	RJ45 (5 pcs. Included)

**Power**

Operating Voltage Range	90-264 VAC
Power Consumption	70 W Maximum
Output Voltage	9 VDC +/- 5% @ 6.5 Amps @ 75°C

**Fusing**

1.25 A slow blow (rack power supply)  
(plug-in modules individually electronically fused)

**Electrical & Mechanical**

Current Protection	Automatic Resettable Solid-State Current Limiters
Circuit Board	Meets IPC Standard
Size (LxWxH)	19 x 7.5 x 6 in (48 x 19 x 15 cm)
Shipping Weight	<8 lb / 3.6 kg

**Environmental**

MTBF	>100,000 hours
Operating Temp	-40° C to +75° C
Storage Temp	-40° C to +85° C
Relative Humidity	0% to 95% (non-condensing) <sup>1</sup>

AGENCY COMPLIANCE



**ORDERING INFORMATION**

Part Number	Description	Fibers Req'd	Fiber	Optical Pwr Budget	Max Distance <sup>2</sup>
FVT120D8M1	Video Transmitter/Data Transceiver	1	Multimode 62.5/125µm	18 dB	1 km (0.621 miles)
FVR120D8M1	Video Receiver/Data Transceiver	1	Multimode 62.5/125µm	18 dB	1 km (0.621 miles)
FVT120D8S1	Video Transmitter/Data Transceiver	1	Single Mode 9/125µm	18 dB	36 km (22 miles)
FVR120D8S1	Video Receiver/Data Transceiver	1	Single Mode 9/125µm	18 dB	36 km (22 miles)
Accessories	Power Cord				
Options	[1] Add suffix 'C' for Conformally Coated Circuit Boards to extend to condensation conditions (Extra charge, consult factory)				

[2] Distance may be limited by optical dispersion. This product requires a fiber installation with a minimum 30 dB connector return loss. The use of Super Polish Connectors is recommended.

Complies with FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J  
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.

**TYPICAL APPLICATION**

