

INSTALLATION AND OPERATION MANUAL

CNGE4+2SMS[POE][HO]

10/100/1000 MBPS INTELLIGENT REDUNDANT RING GIGABIT SWITCH WITH OPTIONAL POE+

This manual serves the following ComNet Model Numbers:

CNGE4+2SMS
CNGE4+2SMSPOE
CNGE4+2SMSPOEHO

The ComNet CNGE4+2SMS[POE][HO] is a four port intelligent switch with light management functionality. It provides two 10/100/1000Base-T(X) copper ports and two 100/1000Base-FX SFP ports. The CNGE4+2SMS[POE][HO] provides exclusive functionality for easy field deployment including DIP switch based operation of RSTP for creating redundant network topologies as well as preventing network video flooding of multicast traffic with IGMP snooping. Copper ports 1 through 4 can optionally supply up to thirty (30) watts of power per port based on the IEEE 802.3at standard. An optional High Output (HO) version is also available that can supply up to sixty (60) watts of PoE from copper ports 1 through 4. This product is fully compatible with the ComNet exclusive CopperLine® SFP modules for operation over extended distance UTP or Coax cable. The ComNet exclusive Port Guardian feature provides additional cyber security protection by enabling physical port lockout in the event that an existing cable is disconnected and prevents a potential network incursion using common spoofing techniques. The intrusion event is reported back to the operator using SNMP.

Contents

Regulatory Compliance Statement	4
Warranty	4
Disclaimer	4
Safety Indications	4
Overview	5
Introduction	5
Software Features	5
Hardware Features	6
Hardware Overview	7
Side Panels	7
Indicating LEDs	10
Cables	11
Ethernet Cables	11
10/100/1000BASE-T(X) Pin Assignments	11
SFP	13
Console Cable	13
DIP Switches	14
WEB Management	22
Configuration by Web Browser	22
System Information	25
Switch Port Configuration	26
Port Statistics	27
RSTP System Configuration	28
RSTP Port Configuration	29
Active Ping Check Configuration	30
Non PoE Model CNGE4+2SMS	30
PoE Model CNGE4+2SMSPOE and CNGE4+2SMSPOEHO	31
Authentication Username and Password Configuration	32
Upgrade Firmware	33
Factory Defaults	34

System Reset	35
Network Interface Configuration	36
SNMP	37
CNGE4+2SMSPOE[HO] PoE-PSE-Status Information	38
CNGE4+2SMSPOE[HO] PoE Contact Information	39
Port Guardian	40
Port Guardian - CLI Reset	41
Static Multicast MAC Routing Per Port	42
Static MAC Lock Configuration	43
IGMPv2 Snooping	44
Jumbo Frame support	46
Command Line Interface Management	47
Configuration by Command Line Interface (CLI).	47
Firmware Upgrade Procedure	50
Technical Specifications	52

Regulatory Compliance Statement

Product(s) associated with this publication complies/comply with all applicable regulations. Please refer to the Technical Specifications section for more details.

Warranty

ComNet warrants that all ComNet products are free from defects in material and workmanship for a specified warranty period from the invoice date for the life of the installation. ComNet will repair or replace products found by ComNet to be defective within this warranty period, with shipment expenses apportioned by ComNet and the distributor. This warranty does not cover product modifications or repairs done by persons other than ComNet-approved personnel, and this warranty does not apply to ComNet products that are misused, abused, improperly installed, or damaged by accidents.

Please refer to the Technical Specifications section for the actual warranty period(s) of the product(s) associated with this publication.

Disclaimer

Information in this publication is intended to be accurate. ComNet shall not be responsible for its use or infringements on third-parties as a result of its use. There may occasionally be unintentional errors on this publication. ComNet reserves the right to revise the contents of this publication without notice.

Safety Indications

- » The equipment can only be accessed by trained ComNet service personnel.
- » This equipment should be installed in secured location.

Overview

Introduction

The CNGE4+2SMS is a light managed, hardened Ethernet switch that contains many features. The switch will work under a wide variety of temperature, dirty and humid conditions. It can be managed through WEB, USB Console or other third-party SNMP software. With the easy to use and intuitive web and CLI interfaces, the switch can be easily monitored by a utility called eVision, which is part of the ComNet eConsole software suite.

eConsole is network management software that is very effective. With easy to use and intuitive interface, you can easily monitor the status of the switches.

Software Features

- » Supports SNMPv1/v2c
- » Event notification by SNMP trap and Relay Output (Relay Output for PoE models only)
- » Web-based GUI and USB Console CLI configuration
- » Enable/disable ports
- » PoE status monitoring and health check
- » RSTP (802.1w)
- » IGMP snooping v2 (64 groups)
- » Jumbo Frame support (10240 MTU)
- » Static MAC lock (per port)
- » Static multicast MAC routing
- » Field firmware upgrade capable
- » Port Guardian physical port lockout feature
- » Active ping check with SNMP trap, port reset & port shutdown capability

Hardware Features


- » 7 × DIP Switches for quick feature selection
- » 2 × Redundant DC power inputs
- » Operating Temperature: -40 - 75°C
- » Storage Temperature: -40 - 85°C
- » Operating Humidity: 5% - 95%, non-condensing
- » 2 × 10/100/1000Base-T(X) Gigabit Ethernet port
- » 2 × 100/1000Base-X SFP
- » 2 × Dry Contact Inputs
- » 2 × Form A Relays
- » USB Console Port
- » Dimensions: 4.1 × 3.7 × 1.46 in (10.4 × 9.4 × 3.7 cm)

Hardware Overview

Side Panels


The following table describes the ports that are on the sides of the CNGE4+2SMS.

Port	Description
10/100/1000Base-T(X) RJ-45 Ethernet ports	4 × 10/100/1000Base-T(X) RJ-45 fast Ethernet ports support auto-negotiation. Default Settings: Speed: auto Duplex: auto Flow control: disable
SFP Ports	2 × 100/1000Base-X SFP
USB Console	Use the included mini USB cable to manage the switch.

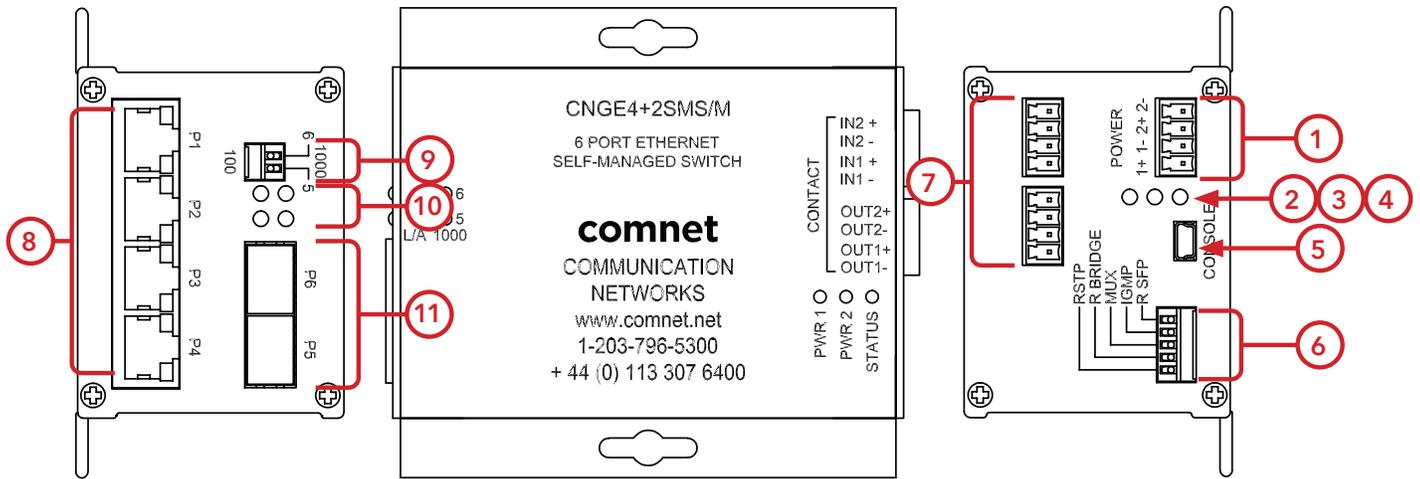


CNGE4+2SMS

1. Power Connections
2. LED for PWR1
3. LED for PWR2
4. LED for STATUS
5. Console Mini USB
6. Configuration DIP switches
7. Contact Closure terminal block
8. RJ-45 Ports 1-4
9. Data Speed DIP switches
10. Link/Activity LEDs for SFP Ports 5 and 6
11. SFP Ports 5 and 6

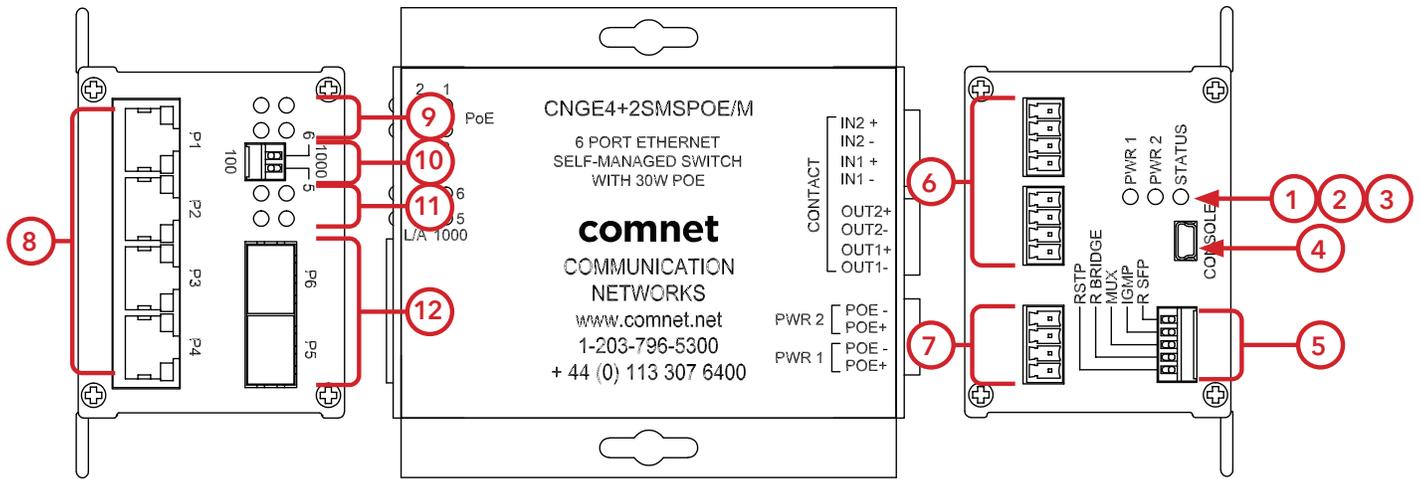

CNGE4+2SMSPOE

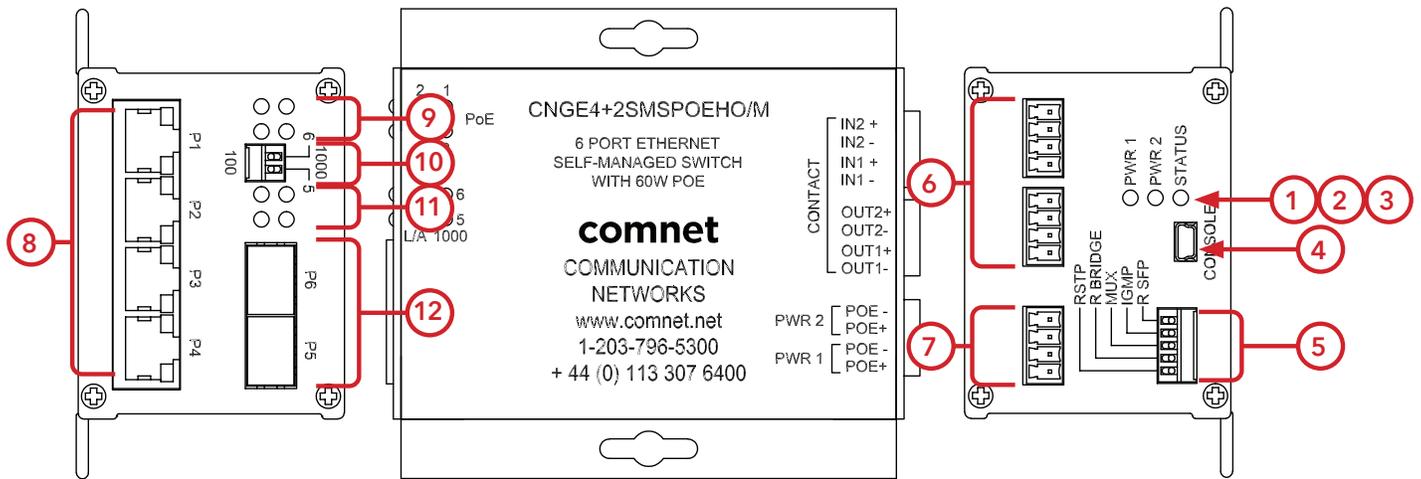

CNGE4+2SMSPOEHO

1. LED for Power 1
2. LED for Power 2
3. LED for Status
4. Console Mini USB
5. Configuration DIP switches
6. Contact Closure terminal block
7. Power connections
8. RJ-45 Ports 1-4
9. PoE Status LEDs for RJ-45 Ports
10. Data Speed DIP switches
11. Link/Activity LEDs for SFP Ports 5 and 6
12. SFP Ports 5 and 6

Indicating LEDs

LED	Color	Status	Description
PWR1	Green	On	DC Power Input 1 Good
		Off	No power detected
PWR2	Green	On	DC Power Input 2 Good
		Off	No power detected
STATUS	Green	On	Initialization passed
	Red	On	Failed
10/100/1000Base-T(X) Ethernet ports			
LNK/ACT	Green	On	Port link up
		Blinking	Data transmitting
1000 Mbps indicator	Amber	On	Port speed is 1000 Mbps
30W/60W	Amber	On	30W PoE power being supplied (POE & POEHO units only)
	Green	On	60W PoE power being supplied (POEHO units only)
SFP			
LNK/ACT	Green	On	Port link up.
		Blinking	Data transmitted.

Cables

Ethernet Cables

The CNGE4+2SMS switches have standard Ethernet ports. According to the link type, the switches use CAT 3, 4, 5, & 5e UTP cables to connect to any other network device (PCs, servers, switches, routers, or hubs). Please refer to the following table for cable specifications.

Cable Types and Specifications

Cable	Type	Max. Length	Connector
10BASE-T	Cat. 3, 4, 5 100Ω	UTP 100m (328ft)	RJ-45
100BASE-TX	Cat. 5 100Ω UTP	UTP 100m (328ft)	RJ-45
1000BASE-TX	Cat. 5/Cat. 5e 100Ω UTP	UTP 100m (328ft)	RJ-45

10/100/1000BASE-T(X) Pin Assignments

With 100BASE-T(X)/10BASE-T cable, pins 1 and 2 are used for transmitting data, and pins 3 and 6 are used for receiving data.

10/100 Base-T RJ-45 Pin Assignments

Pin Number	Assignment
1	TD+
2	TD-
3	RD+
4	Not used
5	Not used
6	RD-
7	Not used
8	Not used

Note: "+" and "-" signs represent the polarity of the wires that make up each wire pair.

1000 Base-T RJ-45 Pin Assignments

Pin Number Assignment	
1	BI_DA+
2	BI_DA-
3	BI_DB+
4	BI_DC+
5	BI_DC-
6	BI_DB-
7	BI_DD+
8	BI_DD-

The CNGE4+2SMS switches support auto MDI/MDI-X operation. You can use a straight-through cable to connect PC to switch. The following table below shows the 10/100BASE-T(X) MDI and MDI-X port pin-outs:

10/100 Base-T MDI/MDI-X pin assignments


Pin Number	MDI port	MDI-X port
1	TD+ (transmit)	RD+ (receive)
2	TD- (transmit)	RD- (receive)
3	RD+ (receive)	TD+ (transmit)
4	Not used	Not used
5	Not used	Not used
6	RD- (receive)	TD- (transmit)
7	Not used	Not used
8	Not used	Not used

1000 Base-T MDI/MDI-X pin assignments

Pin Number	MDI port	MDI-X port
1	BI_DA+	BI_DB+
2	BI_DA-	BI_DB-
3	BI_DB+	BI_DA+
4	BI_DC+	BI_DD+
5	BI_DC-	BI_DD-
6	BI_DB-	BI_DA-
7	BI_DD+	BI_DC+
8	BI_DD-	BI_DC-

SFP

The Switch has fiber optic ports that utilize SFP connectors. ComNet offers a wide selection of SFP modules that offer different fiber type, connector type and distances. Please remember that the TX port of Switch A should be connected to the RX port of Switch B.

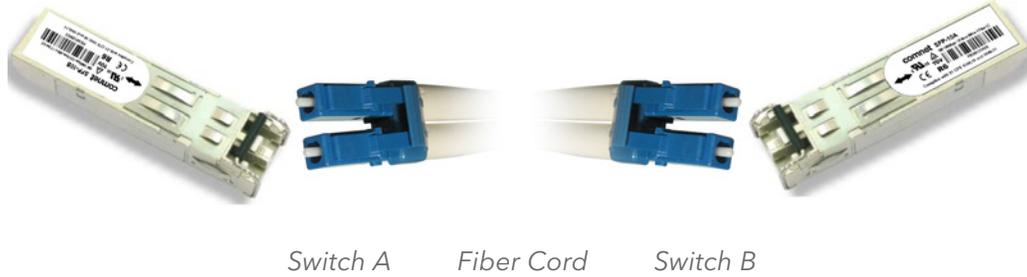

Console Cable

Each CNGE4+2SMS switch can have the initial network settings configured by the management console port. You can connect them to a PC with USB Ports using the supplied USB to USB Mini B male plug cable.



DIP Switches

The CNGE4+2SMS's dip switches configure switch features. The DIP Switches are numbered from left to right when viewing the side of the Switch with the backplate on the bottom and the power connections on the left. If "Web Management Enable" is selected in the management software under System Settings, the DIP switch settings will be overridden by any settings made in the browser interface.

Location on Unit	DIP Switch Position	Description
Rear	1	RSTP enable (down = disabled, up enabled)
	2	Root Bridge Select
	3	Port SMS Mux
	4	IGMP enable
	5	Redundant SFP mode
Front	1	SFP Port 3 speed. Up: 1000M/Down: 100M
	2	SFP Port 4 speed. Up: 1000M/Down: 100M


Switch Function Listing

The switch functions may be set individually or may be combined in the following order to perform enhanced functions above the individual operation. The table below describes the operation of the switch functions. This same table is also available in the help menu of the system webpage.


Summary of the switch configurations (in order of switch priority)

RSTP (Switch 1)	R BRIDGE (Switch 2)	MUX (Switch 3)	R SFP (Switch 5)	Resulting Mode	Comment
ON	OFF	OFF	OFF	RSTP	All ring configurations
ON	ON	OFF	OFF	RSTP	RSTP this bridge set to root
OFF	OFF	ON	OFF	SMS	Port 6 is uplink (traffic from ports 1-5 is sent only to port 6)
OFF	OFF	ON	ON	SMS with Redundant SFP	Fiber fail over with ports 1 through 5 isolation
OFF	OFF	OFF	ON	Redundant SFP	Fiber fail over Port 5 is primary port


SMS MUX Disabled (DIP Switch 3 in OFF Position)

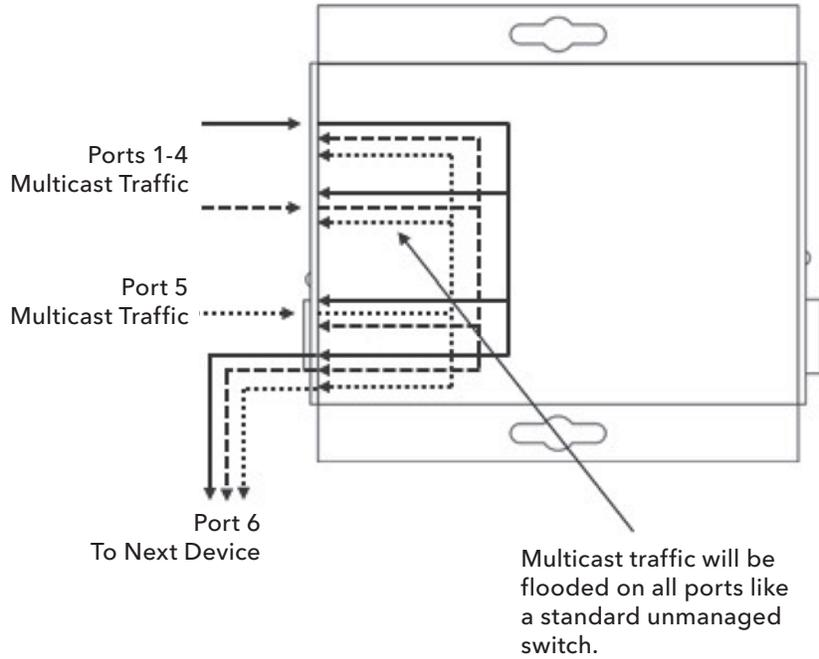

SMS MUX Enabled (DIP Switch 3 in ON Position)

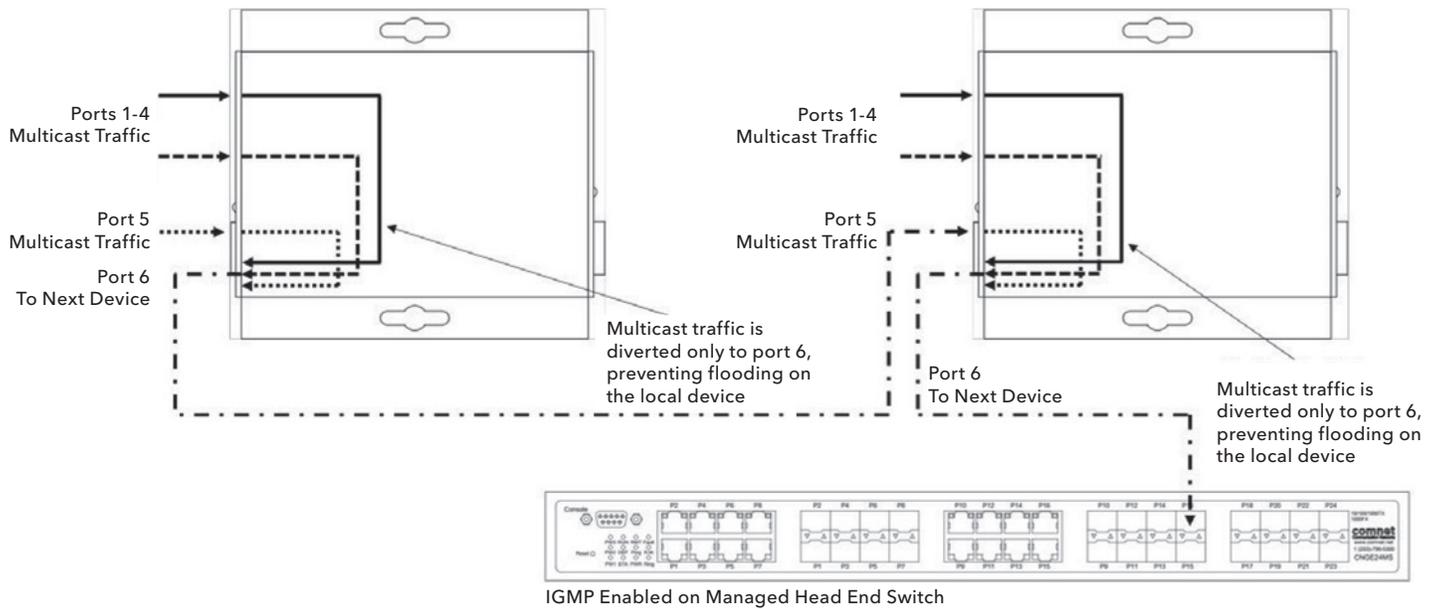


Redundant SFP (RSFP) Enabled (DIP Switch 5 in ON Position)

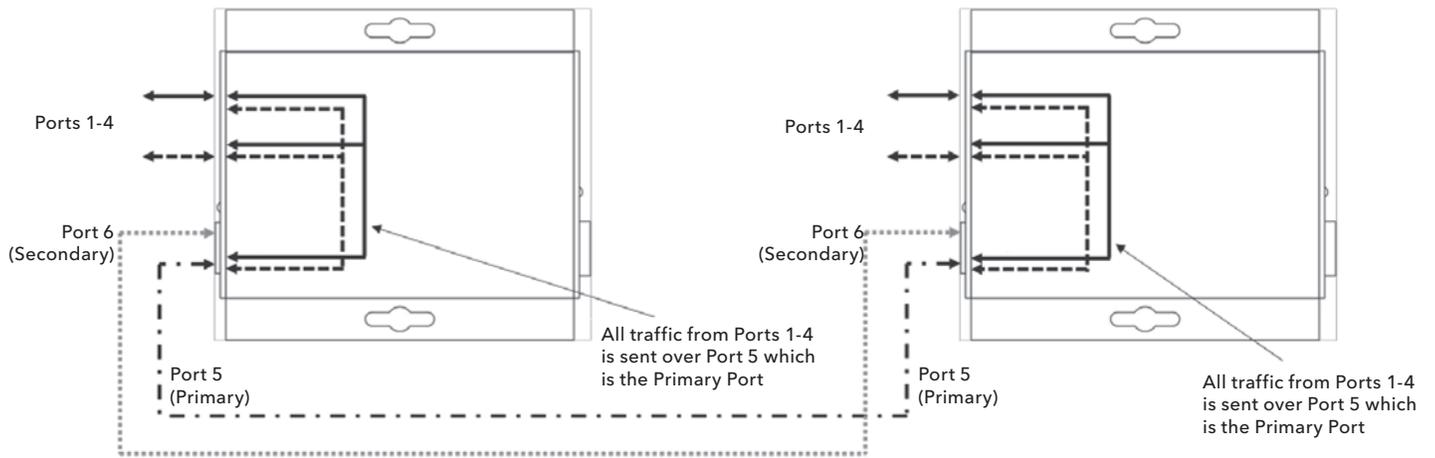

Normal Operation Condition

Note: There is no port isolation between Ports 1 - 4 as shown. Ports 1 - 4 are free to send traffic between each other as per a normal switch.


Redundant SFP (RSFP) Enabled (DIP Switch 5 in ON Position)

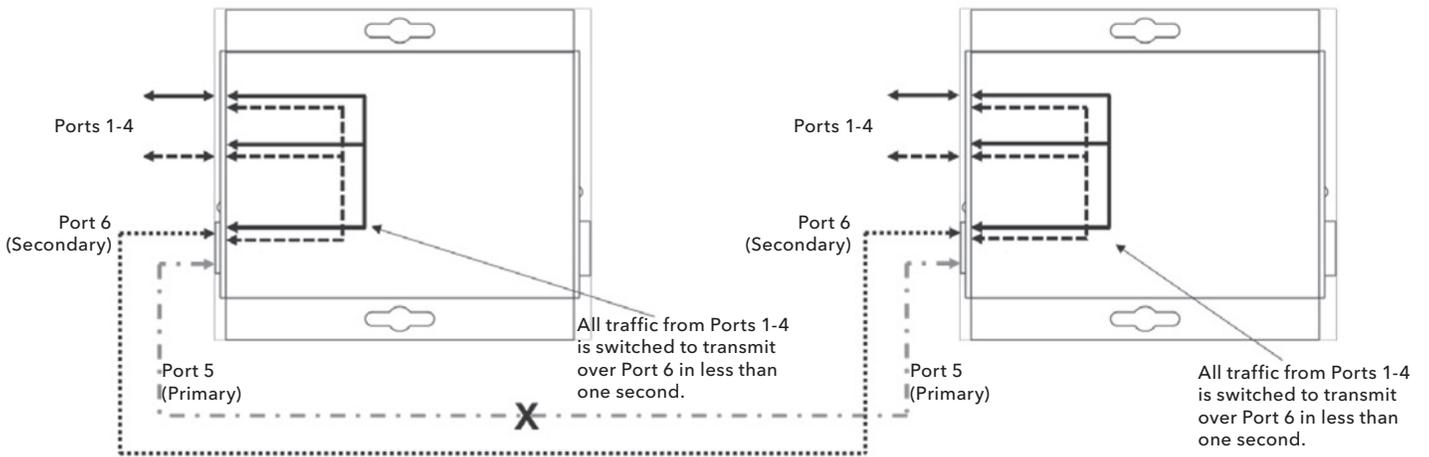

Port 4 Fault Condition

*Note: There is no port isolation between Ports 1 - 4 as shown. Ports 1 - 4 are free to send traffic between each other as per a normal switch.
When Port 5 comes back online all traffic from Ports 1 - 4 is switched back to transmit over Port 5 in less than 1 second.*


Redundant SFP (RSFP) Enabled (3rd Party Switch) (DIP Switch 5 in ON Position)

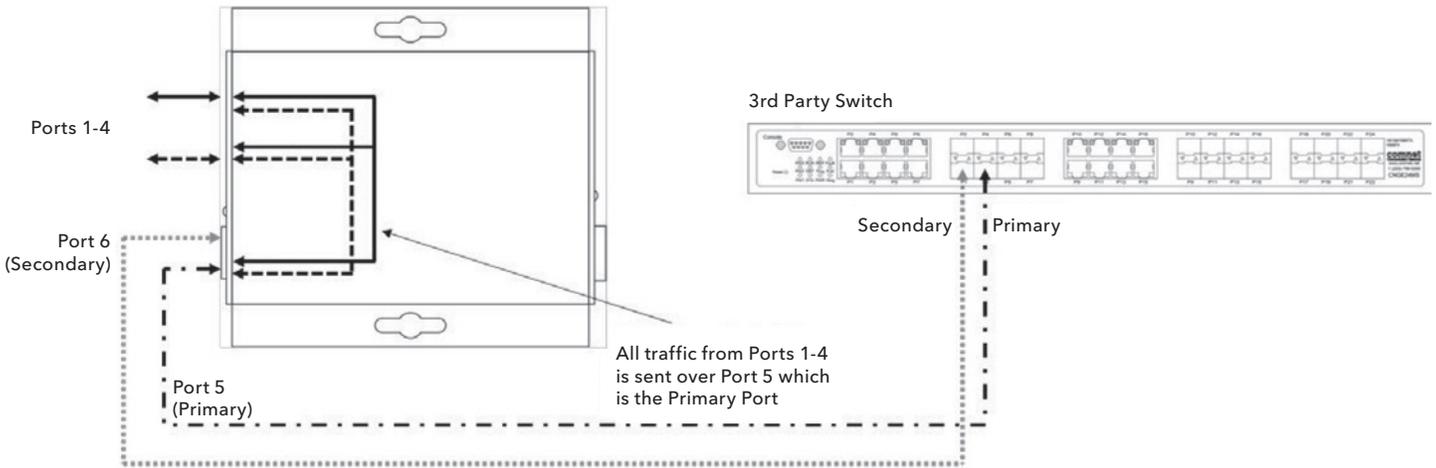

Normal Operation Condition

Note: Disabling MAC Address Learning on the 3rd party switch (if supported) can sometimes allow for faster port switchover times.
There is no port isolation between Ports 1 - 4 as shown. Ports 1 - 4 are free to send traffic between each other as per a normal switch.


Redundant SFP (RSFP) Enabled (3rd Party Switch) (DIP Switch 5 in ON Position)

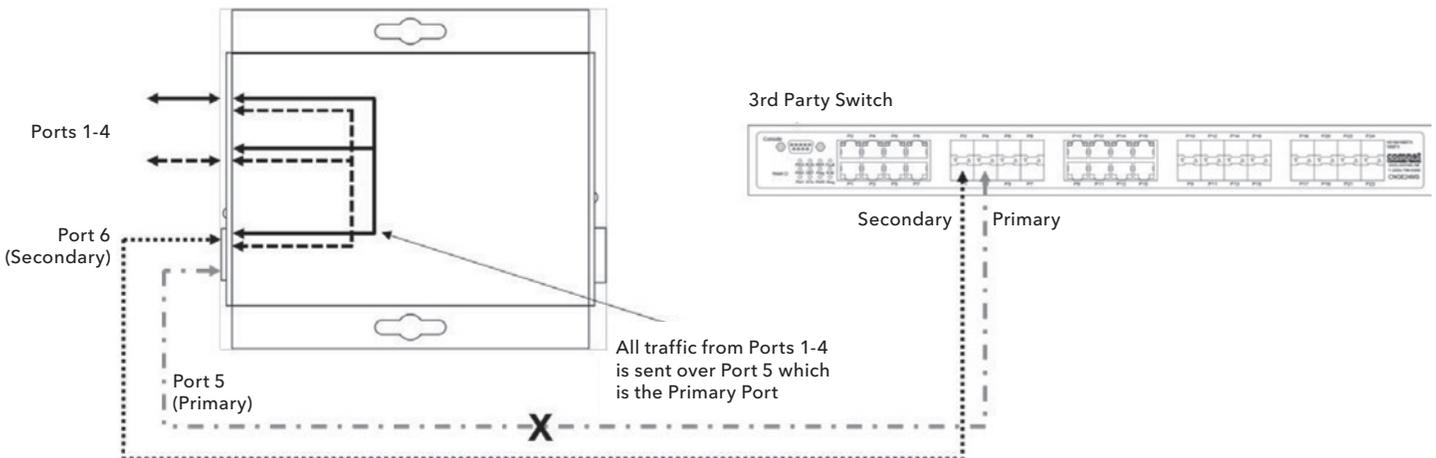

Port 5 Fault Condition

Note: Disabling MAC Address Learning on the 3rd party switch (if supported) can sometimes allow for faster port switchover times.
There is no port isolation between Ports 1 - 5 as shown. Ports 1 - 4 are free to send traffic between each other as per a normal switch.
When Port 5 comes back online all traffic from Ports 1 - 4 is switched back to transmit over Port 5 in less than 1 second.


Redundant SFP (RSFP) Enabled + SMS MUX Enabled (3rd Party Switch) (DIP Switch 3 & 5 ON)

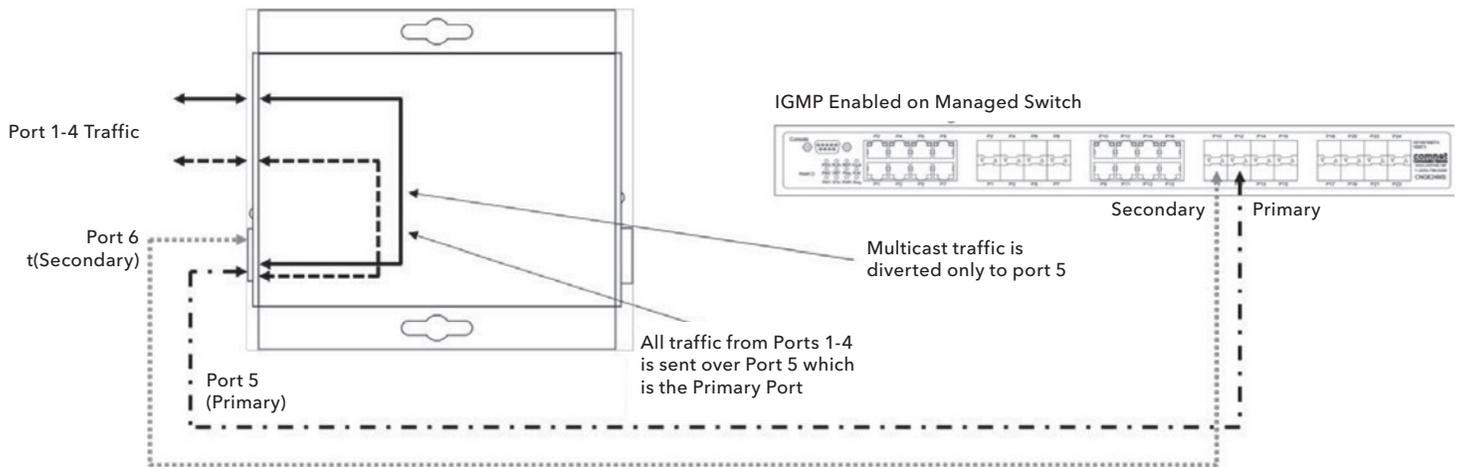

Normal Operation Condition

Note: Disabling MAC Address Learning on the 3rd party switch (if supported) can sometimes allow for faster port switchover times. Multicast traffic is diverted only to port 6 preventing flooding on the local device between Ports 1 - 4. Ports 1 - 4 are isolated from each other.


Redundant SFP (RSFP) Enabled + SMS MUX Enabled (3rd Party Switch) (DIP Switch 3 & 5 ON)

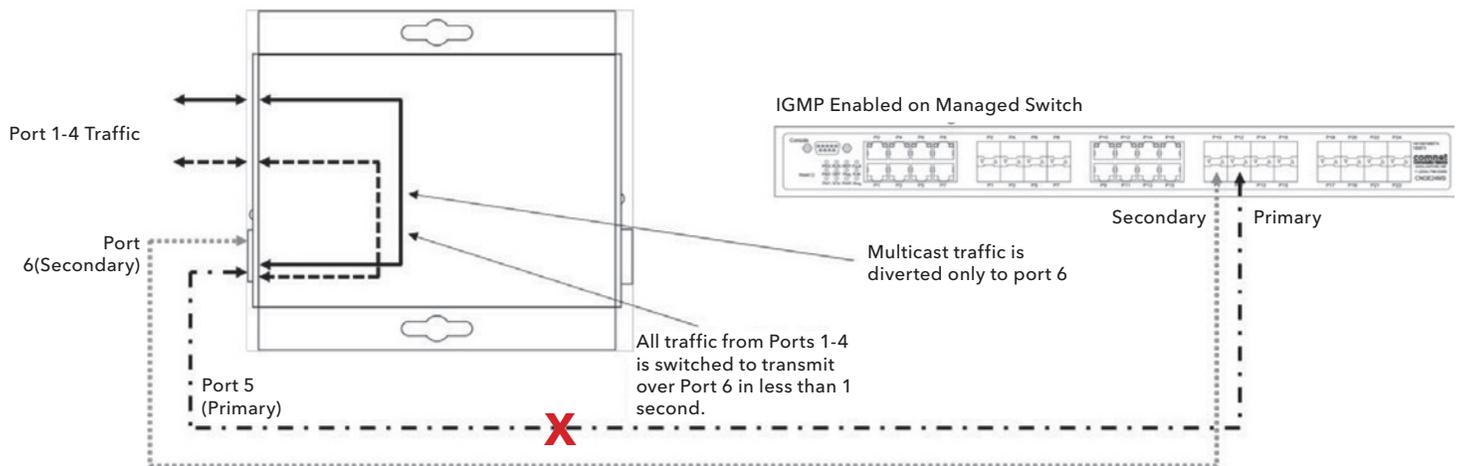

Port 4 Fault Condition

Note: Disabling MAC Address Learning on the 3rd party switch (if supported) can sometimes allow for faster port switchover times. Multicast traffic is diverted only to port 5 preventing flooding on the local device between Ports 1 - 4. Ports 1 - 4 are isolated from each other. When Port 6 comes back online all traffic from Ports 1 - 4 is switched back to transmit over Port 6 in less than 1 second.


RSTP Enabled (Single Ring) (DIP Switch 1 ON)

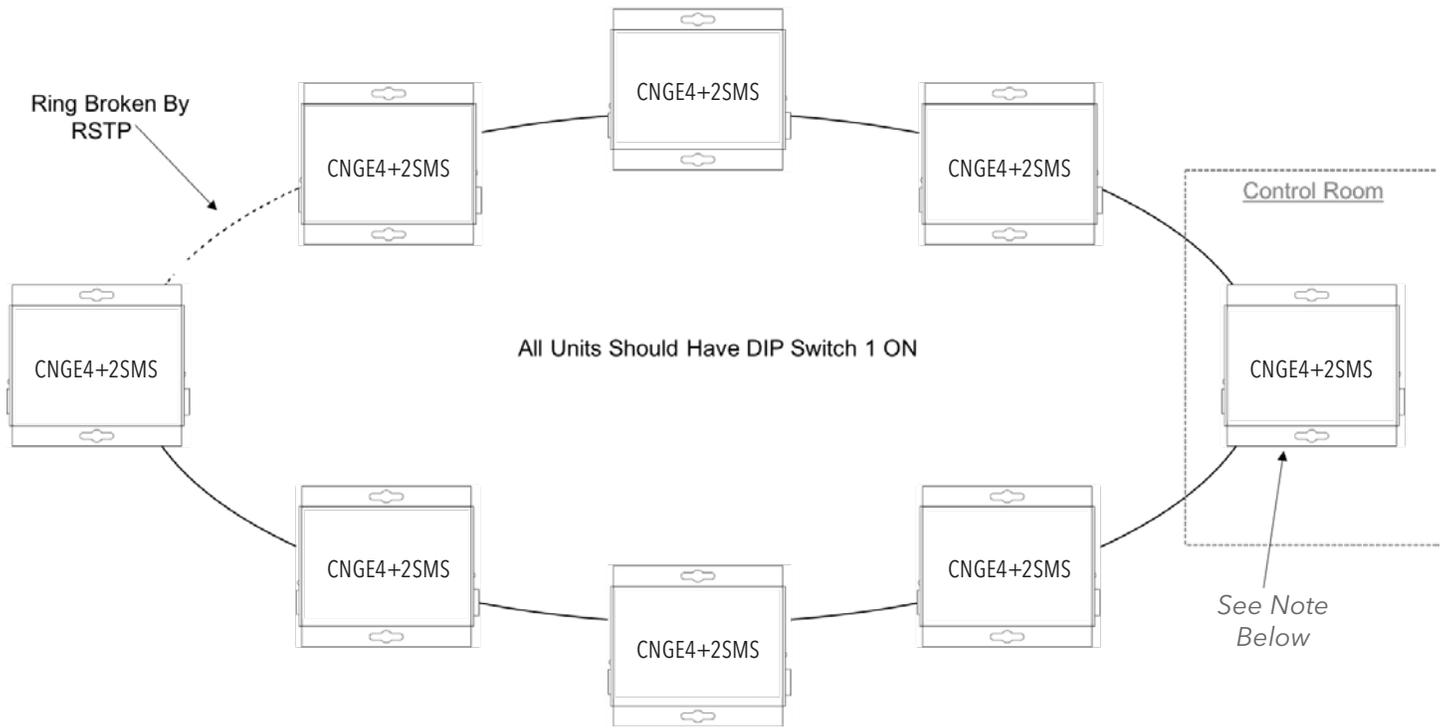

Attention: ComNet recommends maximum number of units per ring is limited to 20 devices. Numbers higher than this may cause undesired performance and are not supported by ComNet.

Note: The unit at the control room location should have DIP switch 3 ON (ROOT BR). This will force the ring to break at the half way point and ensure most effective load sharing on the network.

RSTP Enabled (Multiple Rings) (DIP Switch 1 ON)

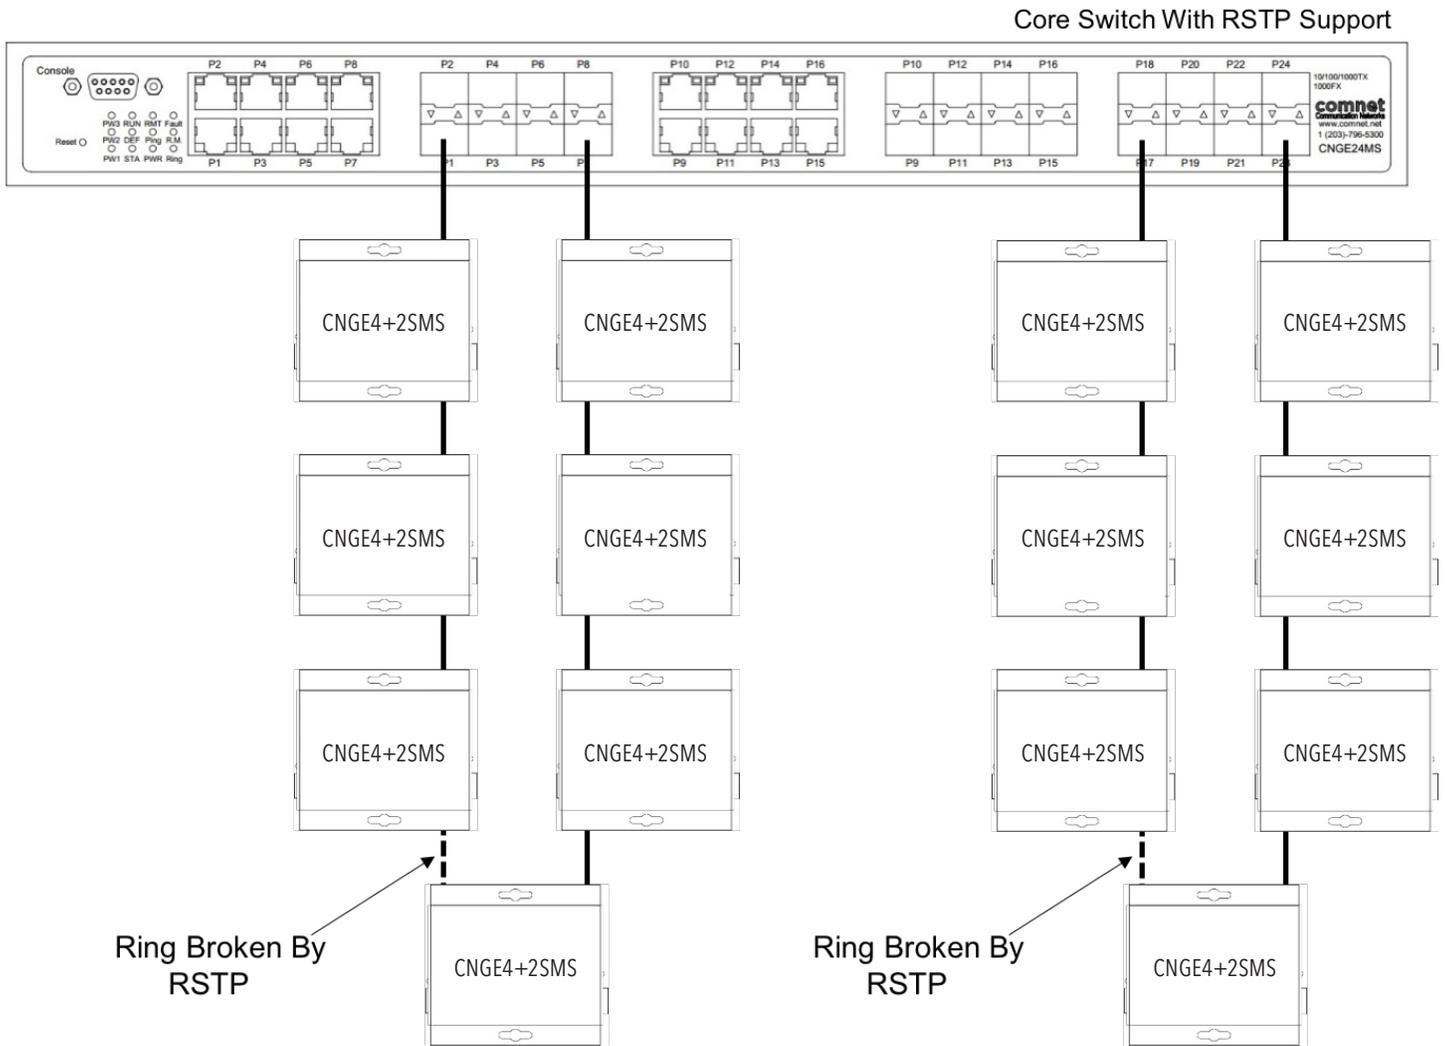


Attention: ComNet recommends maximum number of units per ring is limited to 20 devices. Numbers higher than this may cause undesired performance and are not supported by ComNet.

Attention: Central switch must be manually configured to be the root bridge. This requirement is mandatory for correct performance in a multiple ring scenario.

Attention: ComNet recommends maximum number of rings per core switch is limited to 3-4. The actual number supported will depend on the processing power of the core switch used and other features that may be enabled on the core switch. Please contact ComNet Technical Support to discuss your application prior to ordering.

IGMP & RSTP Enabled (DIP Switch 1 & 5 ON)

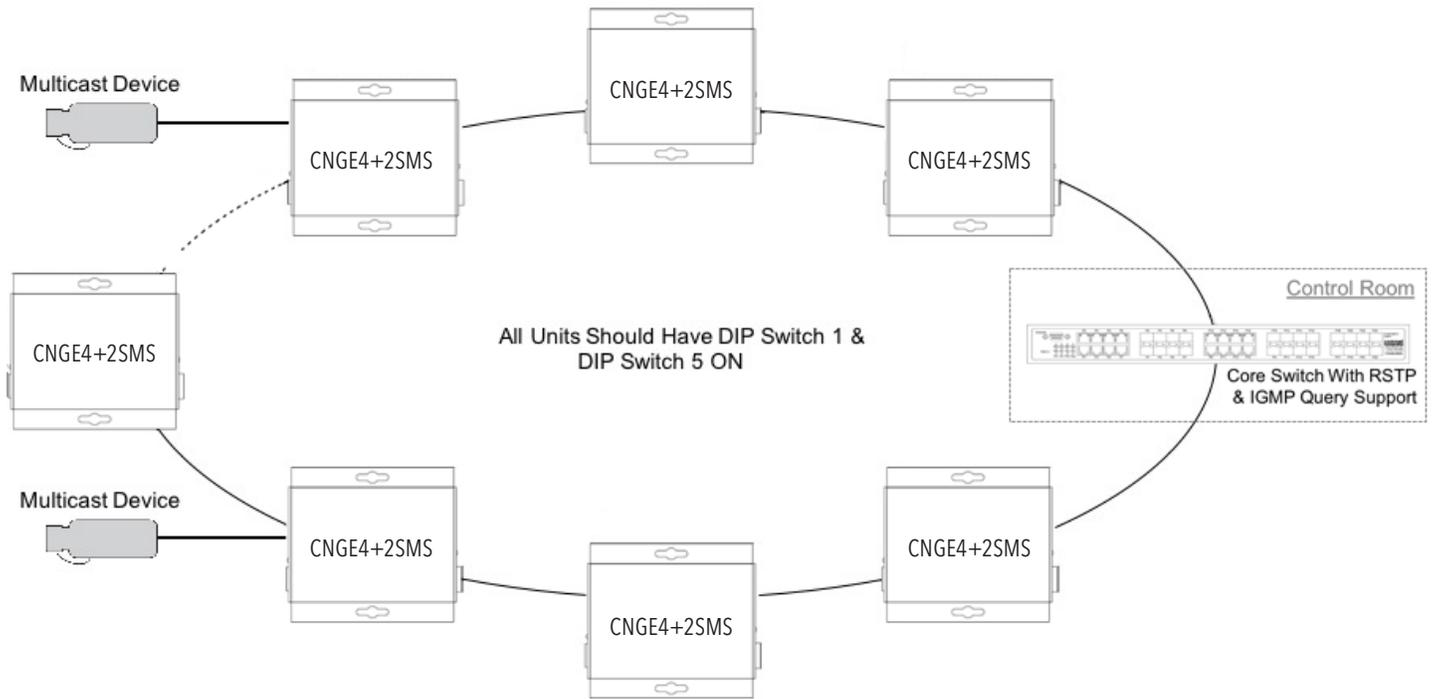

Important Note: The CNGE4+2SMS supports IGMP snooping only. When using the IGMP function a managed switch must be implemented within the network that is configured as the IGMP Querier as shown. Up to 64 IGMP groups are supported on the CNGE4+2SMS switch.

WEB Management

Attention: While installing and upgrading firmware, please remove physical loop connection first. DO NOT power off equipment while the firmware is upgrading!

Configuration by Web Browser

This section provides instruction on configuration through the Web browser.

About Web-based Management

An embedded HTML web site resides in the flash memory on the CPU board. It contains advanced management features and allows you to manage the switch from anywhere on the network through a standard web browser such as Microsoft Internet Explorer.

The Web-Based Management function supports Internet Explorer 5.0 or later.

Preparing for Web Management

The default value is as below:

IP Address: 192.168.10.1

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.10.254

User Name: admin

Password: admin

System Login

1. Launch your Web Browser.
2. Type http:// and the IP address of the switch. Press Enter.



3. The login screen appears.
4. Enter username and password. The default username and password is admin.
5. Select Enter or OK button, then the main interface of the Web-based management appears.



Login screen

Main Interface



CNGE4+2SMSPoE Managed Switch

CNGE4+2SMSPoE
System
Port Config
Port Stats
RSTP Config
LLDP Config
Active Ping Check
Authentication
Firmware Upgrade
Factory Defaults
System Reset
Network Configuration
SNMP

Comnet CNGE4+2SMSPoE

Build Version: RC 8
Build Date: Nov 12 2018 10:39:14

This website is used for management and status of the CNGE4+2SMSPoE device

NOTE: Any modifications to RSTP or network configurations require a reboot

All pages include a help page that describes page options

The apply button on each page will save the displayed configuration in persistent storage to maintain the configuration between power cycles

The USB port CLI is also available to configure the network options, the terminal settings are 115K baud 8,N,1 no flow control

To avoid resubmitting switch configuration, please do not refresh the page. Instead, use the side navigation menu to reload the page.

Main interface

System Information

The switch system information is provided here.

The screenshot shows the 'System Information' page of a comnet switch. The left sidebar contains a navigation menu with items like 'System', 'Port Config', 'RSTP Config', 'LLDP Config', 'Active Ping Check', 'Authentication', 'Firmware Upgrade', 'Factory Defaults', 'System Reset', 'Network Configuration', 'SNMP Configuration', 'POE-PSE Status', 'Contact Config', 'Static Mcast Route', 'Static MAC Lock', 'Port Guardian', 'IGMP Snooping', and 'Jumbo Frame'. The main content area is titled 'System Information' and contains several sections:

- CNGE4+2SMSPoE Switch Settings:** A table with columns: RSTP Enable (not enabled), Port SMS (not enabled), Root BR (not enabled), Redundant SFP Mode (not enabled), IGMP Snooping (not enabled).
- Web Management Enable:** A checkbox that is currently unchecked.
- CNGE4+2SMSPoE Switch Override Settings:** A table with columns: Port SMS (checkbox), Root BR (checkbox), Redundant SFP Mode (checkbox). Below it are 'Port SMS SW Override', 'Root BR SW Override', and 'Redundant SFP SW Override'.
- CNGE4+2SMSPoE Enabled Protocols:** A table with columns: RSTP Enable (not enabled), LLDP Enable (checkbox), Active Ping Check (not enabled), IGMP Snooping (enabled).
- CNGE4+2SMSPoE On Board Temperature Status:** A display showing '38.0 ° C'.
- CNGE4+2SMSPoE Port Link Status:** A table with columns: Port link state (e.g., Link up, Link dn) and Port Disabled (checkbox). Rows include P1 through P6.

At the bottom of the main content area are 'Apply' and 'Help' buttons.

System Information interface

Label	Description
Switch Settings	Summary table of external switch settings
Web Management Enable	Override the side panel switches setting to use the webpage settings instead.
Switch override	Override individual switch functions
Enabled protocols	Summary table of enabled protocols
Temperature	Unit's internal board temperature reading
Port link status	Link status and port disable

Switch Port Configuration

Unless you have reason to change this setting, it is recommended to leave the negotiation set to auto.

The link segment requires forcing the settings. Both ends of the link need to have the same selection.

comnet CNGE4+2SMSPoE Managed Switch

SwitchPort Configuration

Port	Negotiation	Speed	Duplex	Flow Control
Port1	Auto	100	half	none

With forced half duplex mode, flow control ON is recommended

Apply Help

Please perform a System Reset after applying any changes.

SwitchPort Status

Port	Link State	Negotiation	Speed	duplex	flow control
1	Link up	Auto	100mbps	Half	Auto
2	Link dn	-	-	-	-
3		-	-	-	-
4	Link dn	-	-	-	-
5	Link dn	-	-	-	-
6	Link dn	-	-	-	-

SwitchPort Configuration interface

Port Statistics


Use the refresh button to update the port statistics.

The screenshot shows the web interface for a CNGE4+2SMSPoE Managed Switch. On the left is a navigation menu with the following items: CNGE4+2SMSPoE, System, Port Config, Port Stats, RSTP Config, LLDP Config, Active Ping Check, Authentication, Firmware Upgrade, Factory Defaults, System Reset, Network Configuration, SNMP Configuration, POE-PSE Status, Contact Config, and Static Mcast Route. The main content area is titled "Port Statistics" and contains a table of statistics for six ports (Port1 to Port6). The table is titled "CNGE4+ 2SMSPoE Port Statistics" and has columns for Port MIB, Port1, Port2, Port3, Port4, Port5, and Port6. The rows include Egress Stats (OutOctets, OutUnicast, OutBroadcast, OutMulticast, Collisions, OutFCSErr) and Ingress Stats (InGoodOctets, InBadOctets, InMulticast, InBroadcast, InUnicast, InRxErr, InFCSErr). At the bottom of the table area, there is a checkbox for "Clear All Port Counters" and a "refresh stats" button.

Port Statistics interface

RSTP System Configuration

The Rapid Spanning Tree Protocol (RSTP) is an evolution of the Spanning Tree Protocol. It provides faster spanning tree convergence after a topology change. The system also supports STP and the system will auto detect the connected device that is running STP or RSTP protocol.

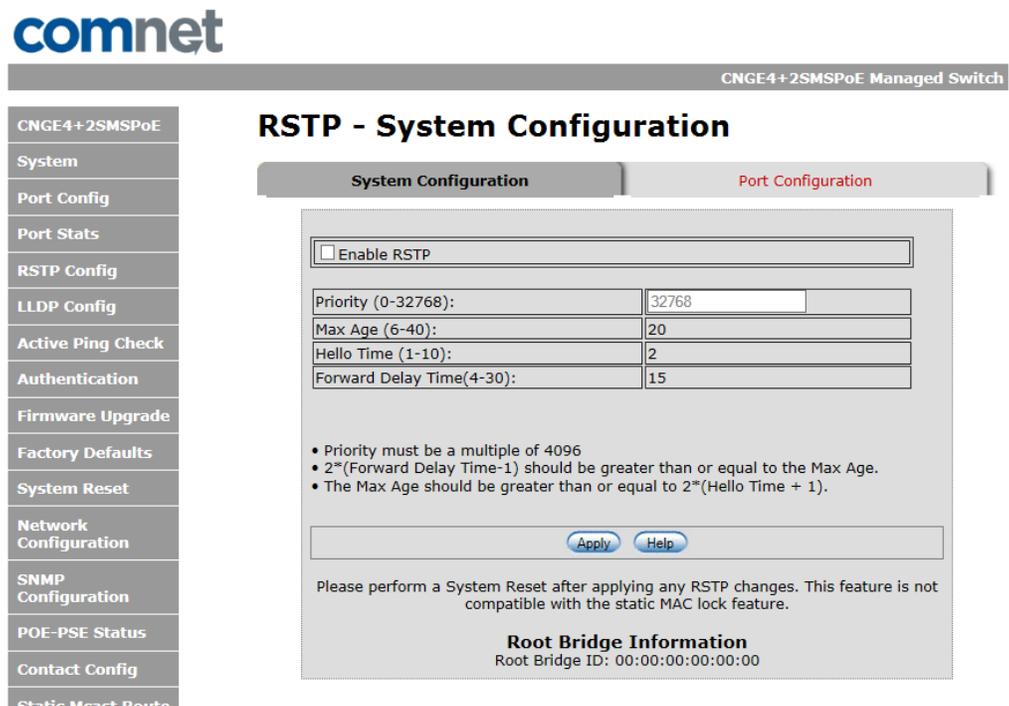

RSTP System configuration interface

Label	Description
Enable RSTP	Select to enable RSTP (only available when the DIP switch settings have been overridden by web management mode. See Page 26.)
Priority	Configure bridge priority, must be a multiple of 4096. If the ROOT BR dip switch is enabled this value will be set to 4096. If the ROOT BR dip switch is disabled this value will be set to 32768 by default.
Root Bridge ID	MAC address of the root bridge

Important Note: RSTP cannot be used in conjunction with the Static MAC Lock feature. A system reset must be performed after making changes to the RSTP settings.

RSTP Port Configuration



CNGE4+2SMSPoE Managed Switch

CNGE4+2SMSPoE

System

Port Config

Port Stats

RSTP Config

LLDP Config

Active Ping Check

Authentication

Firmware Upgrade

Factory Defaults

System Reset

Network Configuration

SNMP Configuration

RSTP - Port Configuration

System Configuration
Port Configuration

Port	Priority(0-240)	PortAdmin
P1 ▾	128	AutoEdge ▾

priority must be a multiple of 16

Apply
Help

Please perform a System Reset after applying any RSTP changes

Port	Role	State	Port Admin	Port Priority	STP Neighbor
1	(unk)	Discarding	AutoEdge	128	none
2	(unknown)	Discarding	AutoEdge	128	none
3	(unknown)	Discarding	AutoEdge	128	none
4	(unknown)	Discarding	AutoEdge	128	none
5	(unknown)	Discarding	AdminP2P	128	none
6	(unknown)	Discarding	AdminP2P	128	none

RSTP Port configuration interface


Label	Description
Port Priority	Configure port priority, must be a multiple of 16.
Port Admin	Configure port Admin or Auto Edge status.
Port Status	Summary table of RSTP port status

Important Note: A system reset must be performed after making changes to the RSTP settings.

Active Ping Check Configuration

Non PoE Model CNGE4+2SMS

The active ping check function allows the switch to check that a configured IP address is alive on each of the RJ45 ports. If the specified IP address becomes unreachable then the switch will perform the action selected in the Failure Action menu.

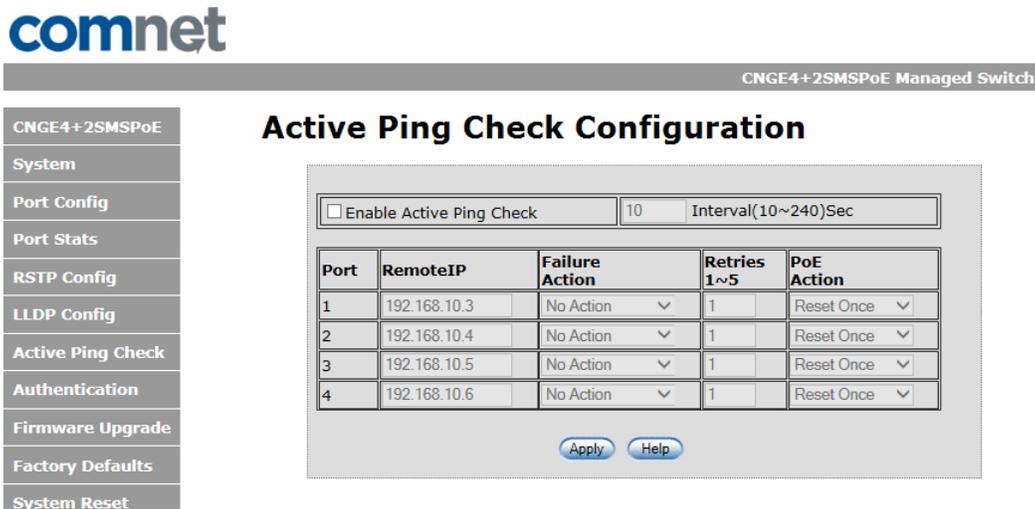

Active Ping Check configuration interface

Label	Description
Enable	Select to enable the active ping check function
Interval	Active ping check interval in seconds
Remote IP	Configure IP addresses of remote device to ping
Failure action	Configure action to take upon failure No Action - No action taken SNMP Trap - Issue an SNMP trap Power Down - Turn off the RJ45 port PwrDwn & Trap - Issue an SNMP trap and then turn off the RJ45 port
Retries	Number of times to retry the ping check on failure before proceeding with the selected failure action.

PoE Model CNGE4+2SMSPOE and CNGE4+2SMSPOEHO



CNGE4+2SMSPoE Managed Switch

CNGE4+2SMSPoE

System

Port Config

Port Stats

RSTP Config

LLDP Config

Active Ping Check

Authentication

Firmware Upgrade

Factory Defaults

Active Ping Check Configuration

Enable Active Ping Check 10 Interval(10~240)Sec

Port	RemoteIP	Failure Action	Retries 1~5	PoE Action
1	192.168.10.3	No Action ▾	1	Reset Once ▾
2	192.168.10.4	No Action ▾	1	Reset Once ▾
3	192.168.10.5	No Action ▾	1	Reset Once ▾
4	192.168.10.6	No Action ▾	1	Reset Once ▾

Label	Description
Enable	Select to enable the active ping check function
Interval	Active ping check interval in seconds
Remote IP	Configure IP addresses of remote device to ping
Failure action	Configure action to take upon failure No Action - No action taken SNMP Trap - Issue an SNMP trap POE Reset - Reboot the PoE device Trap & Reset - Issue an SNMP trap and then reboot the PoE device Power Down - Turn off the RJ45 port PwrDwn & Trap - Issue an SNMP trap and then turn off the RJ45 port
Retries	Number of times to retry the ping check on failure before proceeding with the selected failure action.
PoE Action	PoE action to take Reset Once - Reboot the PoE device once Reset Forever - Reboot the PoE device forever until it comes back online Power Down - Turn off the RJ45 port

If power down is selected for PoE action, the PoE power may be turned on remotely using the port power up feature on the PoE-PSE status page.

Authentication Username and Password Configuration


The username and password entered here are also used in the CLI.

The screenshot shows the comnet web interface for configuring authentication. The page title is "Authentication Username and Password Configuration" and it is for a "CNGE4+2SMSPoE Managed Switch". A sidebar on the left contains a menu with the following items: CNGE4+2SMSPoE, System, Port Config, Port Stats, RSTP Config, LLDP Config, Active Ping Check, Authentication (highlighted), Firmware Upgrade, Factory Defaults, and System Reset. The main content area has the heading "Authentication Username and Password Configuration" and a sub-heading "Username and password apply to both the CLI and Webpage login". Below this is a form with four fields: "System Location" (containing "Location"), "System Contact" (containing "contact"), "Admin Username" (containing "admin"), and "Admin Password" (containing "admin"). At the bottom of the form are two buttons: "Apply" and "Help".

Authentication Username and Password configuration interface

Upgrade Firmware

Upgrade Firmware allows you to update the firmware of the switch. Before updating, have your Windows firmware update application ready and the firmware image is available. RSTP is not available during the firmware update process so please, observe the network topology before upgrading.

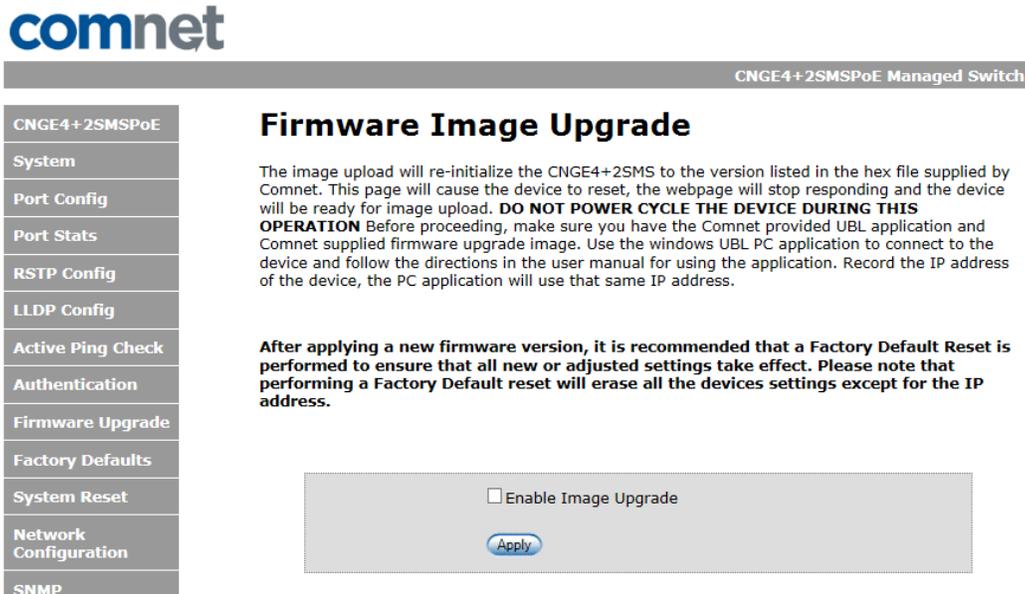

Update Firmware interface

Details on how to upload the new image is located in Firmware Upgrade section on Page 51.

After applying a new firmware version, it is recommended that a Factory Default Reset is performed to ensure that all new or adjusted settings take effect. Please note that performing a Factory Default reset will erase all the devices settings except for the IP address.

Warning Do not enable the firmware update process unless you have a firmware file available and are ready to upgrade the unit. Once this processed is started it cannot be cancelled and if a new firmware is not uploaded to the unit it will be necessary to return the unit to the factory for re-programming.

Factory Defaults

The screenshot shows the comnet web interface for a CNGE4+2SMSPoE Managed Switch. On the left is a navigation menu with the following items: CNGE4+2SMSPoE, System, Port Config, Port Stats, RSTP Config, LLDP Config, Active Ping Check, Authentication, Firmware Upgrade, and Factory Defaults. The main content area is titled "Factory Defaults Reset". Below the title, there is explanatory text: "The Factory Defaults Reset will re-initialize the defaults as shipped from the factory with the exception of the Network settings. The factory default administrative password is shown in the product literature." and a note: "A Factory Defaults Reset is required following a firmware upgrade". At the bottom of the main content area, there is a checkbox labeled "Enable Factory Default Reset" which is currently unchecked, and an "Apply" button below it.

Factory Defaults Reset interface

This function restores the system configuration back to the factory default values. All parameters will revert back to the original factory default values except the network configuration settings.

System Reset

comnet

CNGE4+2SMSPoE Managed Switch

CNGE4+2SMSPoE

System

Port Config

Port Stats

RSTP Config

LLDP Config

Active Ping Check

Authentication

Firmware Upgrade

Factory Defaults

System Reset

System Reset

A system Reset is Required for the following Configuration changes

- **RSTP** from either the dip switch or web management
- **Network Configuration**
- **IGMP enable** from either the dip switch or web management
- **Unregistered Multicast enable**
- **Static multicast route**
- **Static MAC Lock**
- **Jumbo Frame**

The enable check box and apply button will reset the switch
Apply your configuration changes prior to resetting the switch

Enable System Reset

Apply Help

System Reset interface

This feature will perform a system reset.

Some system configuration changes require a system reset to take effect:

- RSTP changes
- File System updates
- Network configuration changes
- IGMP changes
- Static Mack Lock changes
- Static Mcast routing

After a system reset there may be a delay of up to 15 seconds before the device becomes responsive again.

Network Interface Configuration



CNGE4+2SMSPoE Managed Switch

CNGE4+2SMSPoE

System

Port Config

Port Stats

RSTP Config

LLDP Config

Active Ping Check

Authentication

Firmware Upgrade

Factory Defaults

System Reset

Network Configuration

SNMP Configuration

POE-PSE Status

Interface Configuration

This page allows for changing the network configuration settings.

CAUTION: Incorrect settings may cause the board to lose network connectivity. Recovery options will be provided on the next page.

Enter the new settings for the network interface below:

Please perform a System Reset after applying any Network Interface changes.

MAC Address: 00:22:3b:08:00:06

Host Name:

Enable DHCP

IP Address:

Gateway:

Subnet Mask:

Primary DNS:

Secondary DNS:

Interface Configuration interface


Label	Description
Host Name	Assign a name to the device (this is used for CLI and SNMP functions)
Enable DHCP	To enable or disable the DHCP client function. When DHCP client function is enabled, the switch will be assigned the IP address from the network DHCP server. The default IP address will be replaced by the IP address which the DHCP server has assigned.
IP Address	Assign the IP address that the switch will use. If DHCP client Function is enabled, you do not need to assign the IP address.
Gateway	Assign the network gateway for the switch.
Subnet Mask	Assign the subnet mask for the switch.
Primary DNS	Assign the primary DNS IP address
Secondary DNS	Assign the secondary DNS IP address
Apply	Select Apply to set the configurations.

Important Note: A system reset must be performed after making changes to the network settings.

SNMP

Simple Network Management Protocol (SNMP) is the protocol developed to manage nodes (servers, workstations, routers, switches and hubs etc.) on an IP network. SNMP enables network administrators to manage network performance, find and solve network problems, and plan for network growth. Network management systems learn of problems by receiving traps or change notices from network devices implementing SNMP.

Config

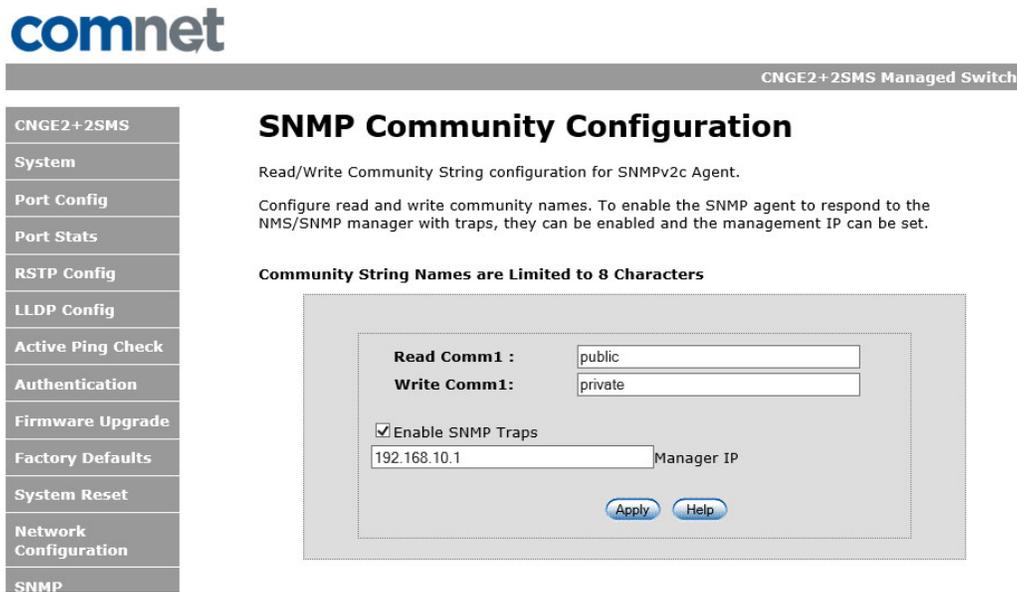

SNMP Community Configuration interface

The following table describes the labels in this screen.

Label	Description
SNMP V1/V2c Community	The switch supports one Read and one Write SNMP community string. Community string names are limited to 8 characters. To disable a community string leave its entry blank.
SNMP trap enable	Enable SNMP traps to be sent to the manager
Manager IP address	IP address of the management software
Apply	Select Apply to activate the configurations.
Help	Show help file.

CNGE4+2SMSPOE[HO] PoE-PSE-Status Information



CNGE4+2SMSPoE Managed Switch

CNGE4+2SMSPoE

System

Port Config

Port Stats

RSTP Config

LLDP Config

Active Ping Check

Authentication

Firmware Upgrade

Factory Defaults

System Reset

Network Configuration

SNMP Configuration

POE-PSE System Information

CNGE4+2SMSPOE PSE Status

Port 1 power : 0.00 Watts	<input type="checkbox"/> Port 1 Power Cycle
Port 2 power : 0.00 Watts	<input type="checkbox"/> Port 2 Power Cycle
Port 3 power : 0.00 Watts	<input type="checkbox"/> Port 3 Power Cycle
Port 4 power : 0.00 Watts	<input type="checkbox"/> Port 4 Power Cycle
Port 1 PD class: None	
Port 2 PD class: None	
Port 3 PD class: None	
Port 4 PD class: None	

Label	Description
Port Power	Displays the amount of power being used on the port in watts
Port Power DN	Turns off PoE power to the associated port
Port Power UP	Turns on PoE power to the associated port
Port PD Class	Displays the PoE class being used by the PoE device
Force PoE Mode	Enables 60 W of PoE in manual forced mode (HO models only).

Warning - please use this feature with caution and ensure it's only enabled when a 60 W PoE device is attached. It should only be enabled if the 60 W devices fail to power up without this option enabled.

Apply	Select Apply to activate the selected configurations
Help	Show help file

TECH SUPPORT: 1.888.678.9427

INS_CNGE4+2SMS_REV- 02/19/13 PAGE 38

CNGE4+2SMSPOE[HO] PoE Contact Information



CNGE2+2SMSPOEHO Managed Switch

- CNGE2+2SMSPOE
- System
- Port Config
- Port Stats
- RSTP Config
- LLDP Config
- Active Ping Check
- Authentication
- Firmware Upgrade
- Factory Defaults
- System Reset
- Network Configuration
- SNMP Configuration
- POE-PSE Status
- Contact Config
- Static Mcast Route
- Static MAC Lock
- Port Guardian
- IGMP Snooping

POE Contact Configuration

CNGE2+2SMSPOEHO Contact Configuration

Output 1 Contact	Output 2 Contact
<input type="checkbox"/> PS1 Fault	<input type="checkbox"/> PS1 Fault
<input type="checkbox"/> PS2 Fault	<input type="checkbox"/> PS2 Fault
<input type="checkbox"/> ActPing 1 loss	<input type="checkbox"/> ActPing 1 loss
<input type="checkbox"/> ActPing 2 loss	<input type="checkbox"/> ActPing 2 loss
<input type="checkbox"/> Port 1 loss	<input type="checkbox"/> Port 1 loss
<input type="checkbox"/> Port 2 loss	<input type="checkbox"/> Port 2 loss
<input type="checkbox"/> Port 3 loss	<input type="checkbox"/> Port 3 loss
<input type="checkbox"/> Port 4 loss	<input type="checkbox"/> Port 4 loss

Contact 1 Manual Override	Contact 2 Manual Override
<input type="checkbox"/> Con 1 ovrd	<input type="checkbox"/> Con 2 ovrd
<input checked="" type="checkbox"/> Con 1 closed	<input checked="" type="checkbox"/> Con 2 closed

CNGE2+2SMSPOEHO Contact Status

Input Contact 1: Contact not Active
Input Contact 2: Contact not Active
Output Contact 1: Contact Closed
Output Contact 2: Contact Closed

Click to refresh the page

Label	Description
Output Contact	The faults that trigger the output contacts are fully configurable by selecting the source(s) to monitor
Contact Override	The contacts may also be forced to an opened or closed state, the state box checked will close the contact when override is selected
Contact status	The input and output contact states are displayed

Port Guardian

The Port Guardian feature provides a high security managed port lock out mode and when enabled will power down the port as soon as a link loss status is detected when a cable is disconnected. This provides high security against network attack by an intruder who accesses the edge device and disconnects it to then try and connect their own intrusion device (laptop, network sniffer etc.).

To reset a port from a lock out state the network administrator can issue an SNMP reset or can reset a port by using the CLI via the USB serial port. In PoE models a reset can also be initiated by using one of the contact inputs.



CNGE2+2SMSPOEHO Managed Switch

CNGE2+2SMSPOE

System

Port Config

Port Stats

RSTP Config

LLDP Config

Active Ping Check

Authentication

Firmware Upgrade

Factory Defaults

System Reset

Network Configuration

SNMP Configuration

POE-PSE Status

Contact Config

Port Guardian

This page allows for enabling a Port lock feature on any ports

Enable Port Guardian

Port Enable

Port 1	Port 2	Port 3	Port 4
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Initial Port Power Down Enable

Power Cycle Reset

Contact Input 1 Reset
 Contact Input 2 Reset

Port Fault Status


Port 1	Port 2	Port 3	Port 4
-	-	-	-

Label	Description
Enable	Enable the Port Guardian feature
Port Enable	Enable the Port Guardian feature on each port
Initial Port Power Down	If enabled, then any ports which are enabled for Port Guardian will be put into lock out state in the event of a power cycle. These ports would then need to be re-enabled by the administrator after a power cycle event.
Power Cycle Reset	If enabled, any ports which were in lock out state will be re-enabled after a power cycle
Contact Input Reset	If enabled, closing the relevant contact input will reset any ports that were previously in lock out state (PoE Models Only)
Port Fault Status	Shows the state of each port
Apply	Select Apply to activate the selected configurations
Help	Show Help file


Port Guardian - CLI Reset

The Port Guardian feature can be cleared from the USB serial port connection on the unit through the CLI and also the port status can be displayed to show any ports that are in lock out state.

To access the Port Guardian CLI commands connect to the CLI using the procedure described in the Command Line Interface Management section on page 48 and then use the commands described below.

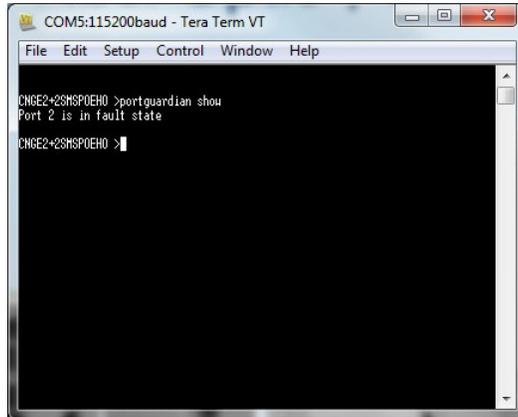

Command	Description
<i>portguardian show</i>	Will display any ports that are currently in port lockout fault state.

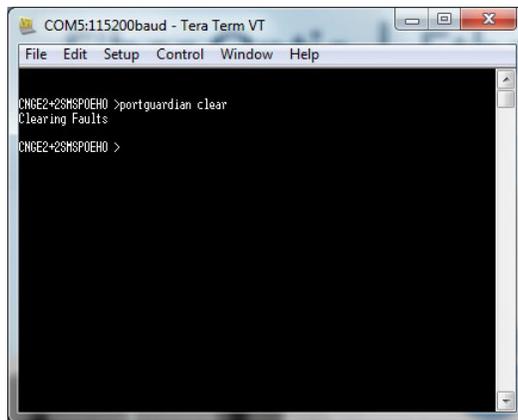

Command	Description
<i>portguardian clear</i>	Will clear any ports that were previously in port lockout fault state.

Static Multicast MAC Routing Per Port



CNGE4+2SMSPoE Managed Switch

CNGE4+2SMSPoE

System

Port Config

Port Stats

RSTP Config

LLDP Config

Active Ping Check

Authentication

Firmware Upgrade

Factory Defaults

System Reset

Network Configuration

IGMP Snooping Multicast MAC Routing

This page allows for enabling multicast traffic routing to a specific port

Enable Static Routing

Static MAC Addr.	Port 1	Port 2	Port 3	Port 4	Port 5	Port 6	Delete
00:00:00:00:00:00	<input type="checkbox"/>						
00:00:00:00:00:00	<input type="checkbox"/>						
00:00:00:00:00:00	<input type="checkbox"/>						
00:00:00:00:00:00	<input type="checkbox"/>						

Static Multicast MAC Routing interface

Label	Description
Enable	Enable static multicast MAC routing
MAC Addr.	Destination Multicast MAC address of the stream
Port Number	Ports to be included in the multicast route
Apply	Select Apply to activate the configurations.
Help	Show help file.

Important Note: A system reset must be performed after making changes to the MAC routing settings.

TECH SUPPORT: 1.888.678.9427

INS_CNGE4+2SMS_REV- 02/19/13 PAGE 42

Static MAC Lock Configuration



CNGE4+2SMSPoE Managed Switch

- CNGE4+2SMSPoE
- System
- Port Config
- Port Stats
- RSTP Config
- LLDP Config
- Active Ping Check
- Authentication
- Firmware Upgrade
- Factory Defaults
- System Reset
- Network Configuration

Static MAC Lock

This page allows for assigning static MAC addresses to a specific participating port. Changes to the MAC lock must be applied to save in the startup configuration and a **reboot is required for changes to take effect. This feature is not compatible with RSTP.**

Enable Static MAC Lock

Static MAC Addr.	Port 1	Port 2	Port 3	Port 4	Port 5	Port 6	Delete
00:00:00:00:00:00	<input type="checkbox"/>						
00:00:00:00:00:00	<input type="checkbox"/>						
00:00:00:00:00:00	<input type="checkbox"/>						
00:00:00:00:00:00	<input type="checkbox"/>						

Static MAC Lock Configuration interface

Label	Description
Enable	Enable static MAC locking
MAC Addr.	MAC address of the device that is allowed to forward and receive traffic. Packets will be dropped for MAC addresses not listed in the table
Port Number	Ports to be included in the locked list
Apply	Select Apply to activate the configurations.
Help	Show help file.

Important Note: *RSTP cannot be used in conjunction with the Static MAC Lock feature. A system reset must be performed after making changes to the static MAC lock settings.*

Label	Description
Enable	Enable IGMP Snooping
Group timer	Must be set above the general query interval
Port Timer	Expected wait interval of membership reports for a specific group
Unregistered Flooding	Allow unregistered multicast traffic to propagate across ports
Assigned router port	Router ports forward membership reports
Multicast Groups	The IP address of the groups are displayed along with the port assignment, 64 multicast groups are supported and the table spans across 3 pages.
Apply	Select Apply to activate the configurations.
Help	Show help file.

Important Note: A system reset must be performed after making changes to the IGMP settings.

Jumbo Frame support



CNGE4+2SMSPoE Managed Switch

CNGE4+2SMSPoE	<h2 style="margin: 0;">Jumbo Frame Port Configuration</h2> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <th style="font-size: small;">Port1</th> <th style="font-size: small;">Port2</th> <th style="font-size: small;">Port3</th> <th style="font-size: small;">Port4</th> <th style="font-size: small;">Port5</th> <th style="font-size: small;">Port6</th> </tr> <tr> <td style="font-size: x-small;">10240 MTU ▾</td> </tr> </table> <p style="font-size: x-small; margin-top: 5px;">The MTU size when not enabled is 1522, RFC 1191</p> <div style="text-align: center; margin-top: 5px;"> <input type="button" value="Apply"/> <input type="button" value="Help"/> </div> <p style="font-size: x-small; margin-top: 5px;">Please perform a System Reset after applying any Jumbo Frame changes.</p>	Port1	Port2	Port3	Port4	Port5	Port6	10240 MTU ▾					
Port1		Port2	Port3	Port4	Port5	Port6							
10240 MTU ▾		10240 MTU ▾											
System													
Port Config													
Port Stats													
RSTP Config													
LLDP Config													
Active Ping Check													
Authentication													
Firmware Upgrade													
Factory Defaults													

Jumbo Frame Port Configuration interface

Label	Description
MTU size	the drop down box allows for maximum frame size, the default is the maximum frame size 10,240. Not enabled defaults the maximum frame size to 1522 MTU.
Apply	Select Apply to activate the configurations.
Help	Show help file.

Important Note A system reset must be performed after making changes to the Jumbo Frame settings.

Command Line Interface Management

Configuration by Command Line Interface (CLI).

About CLI Management

Besides WEB-base management, the CNGE4+2SMS also supports CLI management for network configuration. You can use USB console to manage the switch by CLI.


CLI Management by USB Console (115200, 8, none, 1, none)

Before configuring by USB console, use a USB mini B cable to connect the switch's Console port to your PC's USB port.


Follow the steps below to access the console via USB mini B cable.

Step 1. Connect the USB cable between the PC and the CNGE4+2SMS. If the device driver is not found, the product CD includes the windows .inf driver.


Step 2. From the Windows desktop, select on Start -> Tera Term

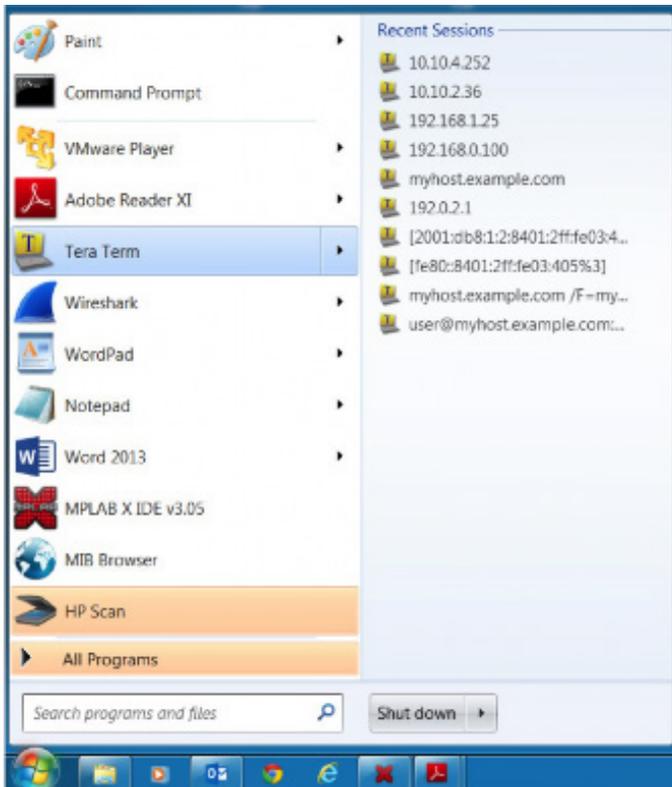


Step 3. Select the COM port number

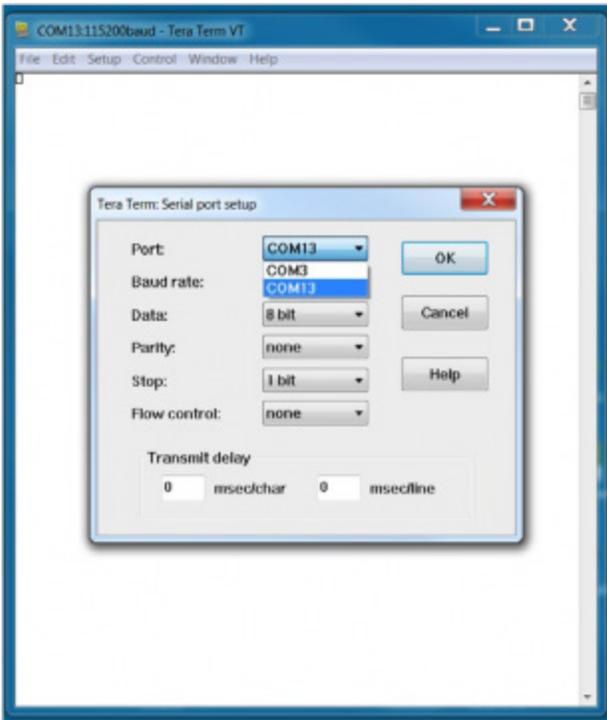

Step 4. The COM port properties setting, 115200 for Bits per second, 8 for Data bits, None for Parity, 1 for Stop bits and none for Flow control.

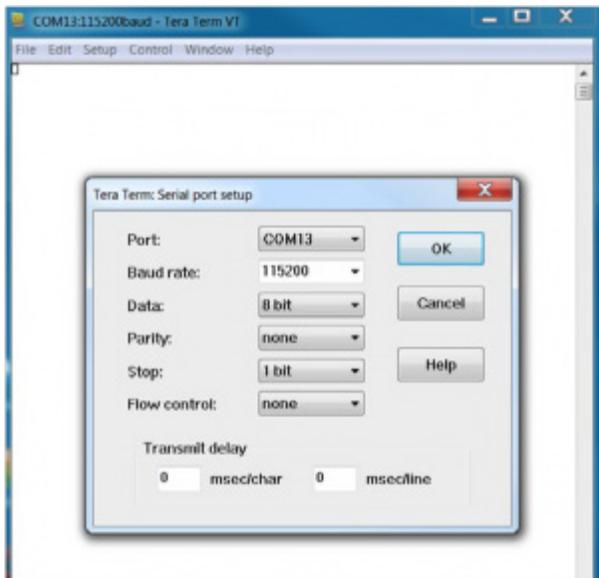

Step 5. Hit enter to initiate the connection and receive the username prompt. After entering the username and password the console will be presented with a CLI prompt.

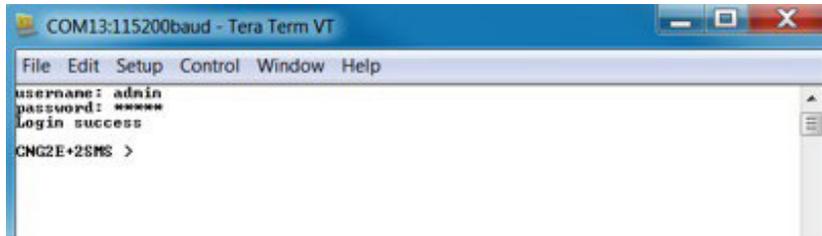


```

COM13:115200baud - Tera Term VT
File Edit Setup Control Window Help
username: admin
password: *****
Login success
CNGE2+2SMS >

```

Enter "?" or "help" to list the commands

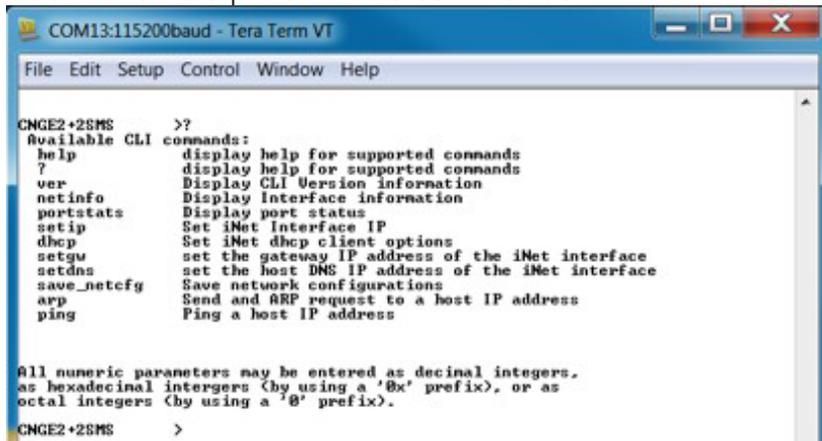


```

COM13:115200baud - Tera Term VT
File Edit Setup Control Window Help
CNGE2+2SMS >?
Available CLI commands:
help          display help for supported commands
?            display help for supported commands
ver          Display CLI Version information
netinfo      Display Interface information
portstatus   Display port status
setip        Set iNet Interface IP
dhcp         Set iNet dhcp client options
setgw        set the gateway IP address of the iNet interface
setdns       set the host DNS IP address of the iNet interface
save_netcfg  Save network configurations
arp          Send and ARP request to a host IP address
ping         Ping a host IP address

All numeric parameters may be entered as decimal integers,
as hexadecimal integers (by using a '0x' prefix), or as
octal integers (by using a '0' prefix).
CNGE2+2SMS >

```

More detailed help for each command is available using help in front of the command name.

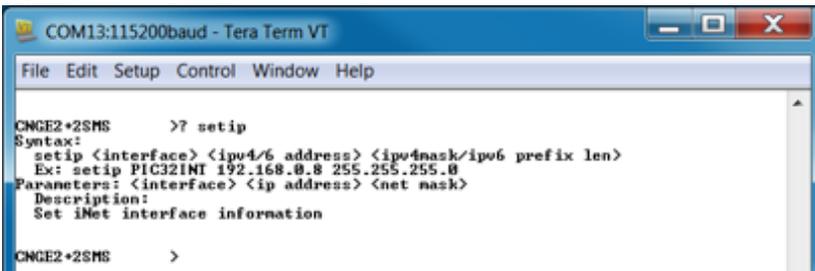

```

COM13:115200baud - Tera Term VT
File Edit Setup Control Window Help
CNGE2+2SMS >? setip
Syntax:
  setip <interface> <ipV4/6 address> <ipV4mask/ipV6 prefix len>
  Ex: setip PIC32INT 192.168.0.8 255.255.255.0
Parameters: <interface> <ip address> <net mask>
Description:
  Set iNet interface information
CNGE2+2SMS >

```

Issuing a "netinfo" command will display the ip address of the switch

To change the network configuration using the CLI, the following commands must be used:

- setip
- setgw
- setdns

Save_netcfg if you want to save these changes in the startup configuration. Not using this command will not save the changes persistently.

Firmware Upgrade Procedure



CNGE2+2SMS Managed Switch

CNGE2+2SMS
System
Port Config
Port Stats
RSTP Config
LLDP Config
Active Ping Check
Authentication
Firmware Upgrade
Factory Defaults
System Reset
Network Configuration

Firmware Image Upgrade

The image upload will re-initialize the CNGE2+2SMS to the version listed in the hex file supplied by Comnet. This page will cause the device to reset, the webpage will stop responding and the device will be ready for image upload. Use the windows PC application to connect to the device and follow the directions in the user manual for using the application. Record the IP address of the device, the PC application will use that same IP address.


After applying a new firmware version, it is recommended that a Factory Default Reset is performed to ensure that all new or adjusted settings take effect. Please note that performing a Factory Default reset will erase all the devices settings except for the IP address.

Enable Image Upgrade

Push Bootloader Image Uploader interface

The steps for upgrading the unit with the push boot loader are as follows;

1. Bring up the web server and open the FileSystem Upload page click the Enable Image upload check box and hit apply.
2. Open the Windows bootloader application, click the enable Ethernet check box and adjust the IP address to the target IP

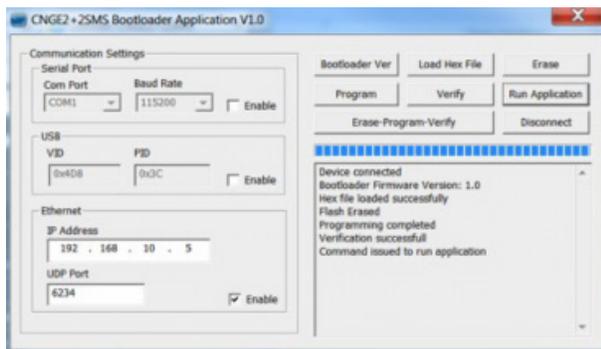

3. Click the "Load Hex File" and select the new firmware file.
 - Click Erase
 - Click Program
 - Click Verify
 - Click run application

Note: The "Erase-Program-Verify" button is not supported at this time. Please use the individual buttons.

Warning: Do not enable the firmware update process unless you have a firmware file available and are

ready to upgrade the unit. Once this processed is started it cannot be cancelled and if a new firmware is not uploaded to the unit it will be necessary to return the unit to the factory for re-programming.

Technical Specifications

Technology

Ethernet Standards	IEEE 802.3 for 10BASE-T IEEE 802.3u for 100BASE-TX and 100BASE-FX IEEE 802.3z for 1000BASE-X IEEE 802.3ab for 1000BASE-T IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol) IEEE 802.1AB for LLDP (Link Layer Discovery Protocol) IEEE 802.3at for Power Sourcing Equipment (PSE) and PoE (≤ 30 W per port) IEEE 802.3x Flow Control and Back Pressure
--------------------	--

Software Features	RSTP (IEEE 802.1D/w) Port Configuration, Status, Statistics, Security PoE Configuration, Status, Health Check SNMP Enable/Disable Ports Port Guardian Physical Port Lockout IGMP Snooping v2 SNMP Trap LLDP Static Multicast MAC Routing Static MAC Lock Security Active Ping Check with SNMP Trap, Port Reset & Port Shutdown capability
-------------------	--

Interface

SFP	2 × 100/1000Base-X SFP
RJ45 Ports	2 × 10/100/1000Base-T(X), Auto MDI/MDIX
LED Indicators	Per Unit : Power × 2 (Green) RJ45 Ports: Per Port : Link/Activity(Green/Blinking Green), 1000 Mbps indicator (Amber) SFP Ports: Per Port : Link/Activity(Green/Blinking Green)

Power Requirements

Power Input Voltage	Dual 48 to 57 VDC PoE, 9 to 36 VDC or 24 VAC non PoE
Current Draw	3.5A max, with PoE, 1A w/out PoE
Reverse Polarity Protection	Present (On Terminal Block of Non-PoE Models Only)

Environmental

Operating Temperature	-40 to +75 °C
Storage Temperature	-40 to +85 °C
Operating Humidity	5% to 95%, non-condensing

Mechanical	
Dimension	4.1 × 3.7 × 1.46 in (10.4 × 9.4 × 3.7 cm)
Casing	Aluminum
Regulatory Approvals	
EMC	EN50130-4:2011 EN55024:2010 EN55022:2010
EMS	EN 55022:2010 Radiated Emissions EN 55022:2010 Conducted Emissions EN 61000-3-2-2006+A2:2009 Harmonic Current Emissions EN 61000-3-3:2013 Voltage Fluctuations EN 61000-4-2:2009 ESD EN 61000-4-3:2006 + A2:2010 Radiated Electromagnetic Field Immunity EN 61000-4-4:2012 EFT EN 61000-4-5:2006 Surge Immunity EN 61000-4-8:2010 Magnetic Field Immunity EN 61000-4-11:2004 Voltage Dips and Fluctuations EN 50130-4:2011 Mains Supply Variations
Safety	EN 60950-1 SELV
Warranty	Lifetime

MECHANICAL INSTALLATION INSTRUCTIONS

ComNet Customer Service

Customer Care is ComNet Technology's global service center, where our professional staff is ready to answer your questions at any time.

Email ComNet Global Service Center: customer care@comnet.net



3 CORPORATE DRIVE | DANBURY, CT 06810 | USA
T: 203.796.5300 | F: 203.796.5303
TECH SUPPORT: 1.888.678.9427
INFO@COMNET.NET

SUITE 7, CASTLEGATE BUSINESS PARK
CALDICOT | SOUTH WALES, UK | NP26 5AD
T: +44 (0) 2036 300 695 | F: +44 (0)113 253 7462
INFO-EUROPE@COMNET.NET