



QUICK START GUIDE



INDUSTRIAL OUTDOOR 802.11A/B/G/N DUAL RADIO WIRELESS ETHERNET

**This manual serves the following
ComNet Model Numbers:**

NW8
NW8E

Thank you for purchasing NetWave® from ComNet. This quick start guide is designed to walk you through installation.

This guide applies to the following models:

NW8: Industrial Multipoint, FCC Version, User Configurable

NW8E: Industrial Multipoint, ETSI Version, User Configurable

An easy to read LED array displays unit operational status along with received signal strength for Radio 1 ensuring optimal installation and operation. See **Figure 2** on **Page 2** for LED Indicator explanations.

See **Figures 3** through **6** beginning on **Page 3** for mounting instructions.

FIGURE 1 - INDUSTRIAL DUAL RADIO WIRELESS ETHERNET DEVICE



FIGURE 2 - STATUS LED INDICATIONS


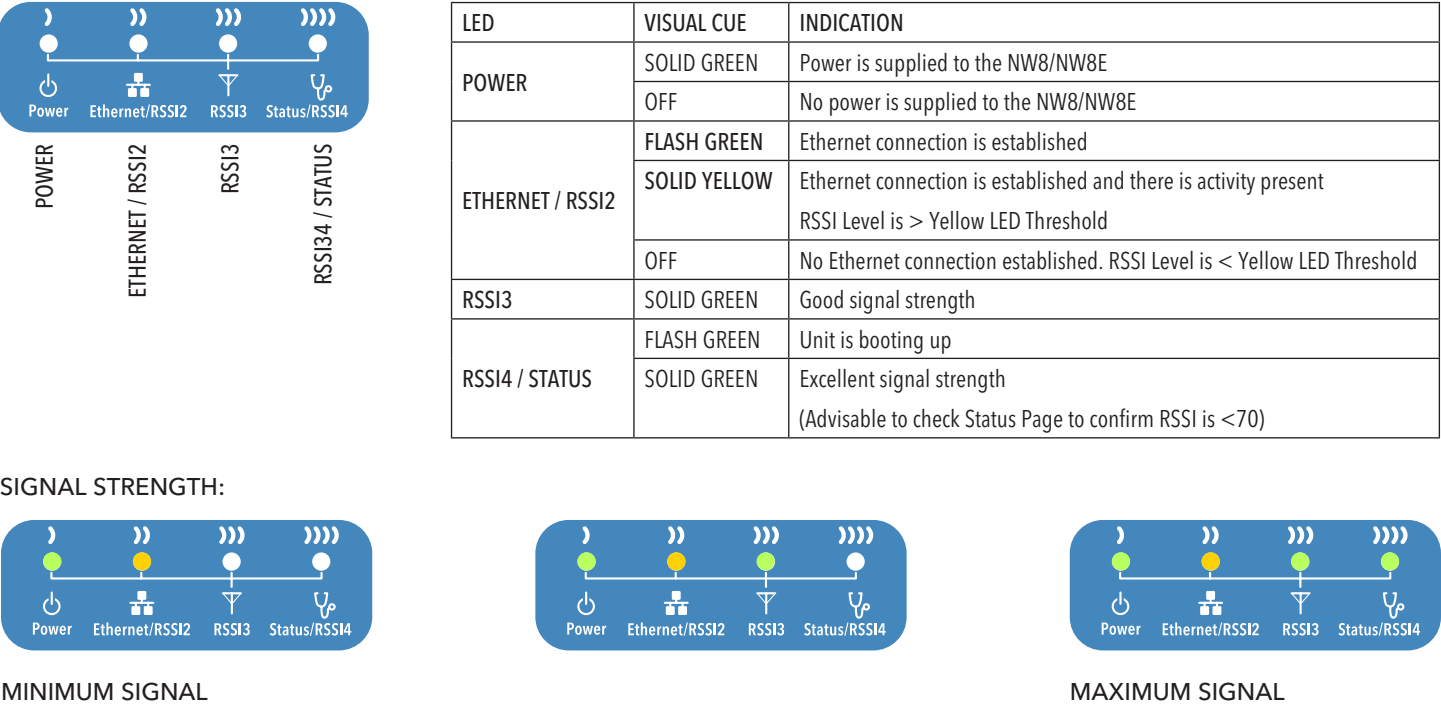


FIGURE 3 - INSTALLATION INSTRUCTIONS

Step 1.

Unpack the mounting hardware from the box. Determine if this will be a pole or wall mount application. The included Mounting kit is designed to support poles up to 3 in (7.6 cm) in diameter. If surface or wall mounting, the optional NWBKT1 hardware will be required.

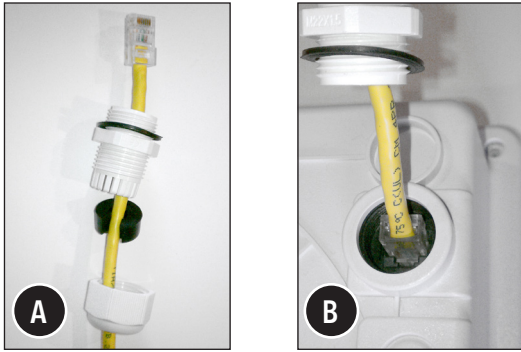

Step 2.

- A. Route the RJ45 connectorized Ethernet cable through the weather tight gland connection as shown at left.

Note: The slit rubber washer allows a pre-terminated Ethernet cable to be used.

Once the cable has been routed through the weather connection as shown above, push the split rubber gasket into place and loosely screw the cap that goes over the rubber washer.

- B. Snap the RJ-45 connector in place as shown

Step 3.

Slide the weather proof assembly over the cable so it can be screwed into the enclosure gland. Make sure the rubber sealing ring is in place as shown in step 2B.

Tighten the weather proof assembly into the enclosure and also tighten the cap that squeezes the rubber washer over the Ethernet cable as shown.

Step 4.

- A. Connect one end of an RJ-45 Ethernet cable to the OUT port of the Power Injection Module (PIM) and the other end to LAN of the access point.

Maximum length of the RJ-45 CAT5 cable is 100 meters when powering only the Access Point. Maximum length is 30 meters if Access Point powers an external Powered Device.*

- B. Connect the RJ-45 Ethernet cable attached to the PIM to a network device, such as to a switch or to the PC you will use to configure the access point.

- C. Connect the power cord to the main electrical supply and the IEC plug into the socket of the PIM.

PoE power input: Passive PoE (range 48 to 57 VDC)
The NW8[E] can also be powered by a suitable IEEE 802.3af/at PSE device such as a PoE switch or the included CNGE1IPS injector.

- D. Connect the RJ-45 cable from Port 2 on the access point to an external PoE device, typically a camera as shown.

- E. A Drip Loop is recommended as additional precaution against moisture.

* Up to 200mW radio. For higher power radio upgrade to higher rating power adapter.

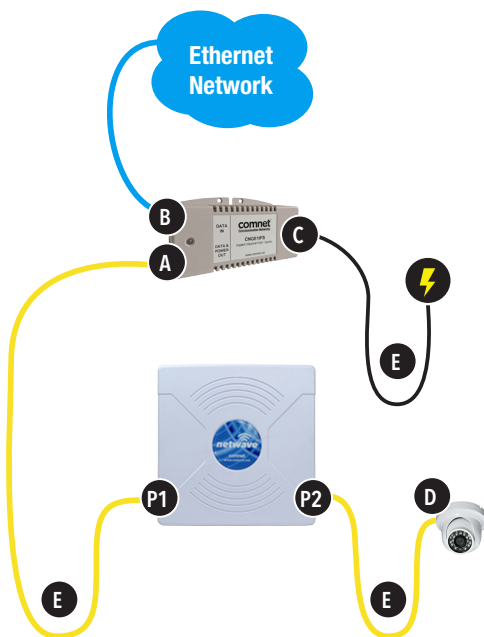
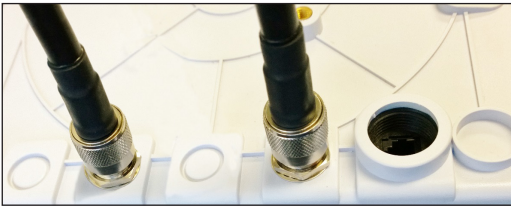


FIGURE 4 - ANTENNA INSTRUCTIONS**Connections****Step 1.**

Determine the correct cable type and length needed to connect the NetWave device to your antenna (antenna and cables not included).
The NetWave NW8 and NW8E have N Female connectors to attach the external antenna cables to.

**Step 2.**

Press down firmly on the N Male connector of the antenna cable and tighten.

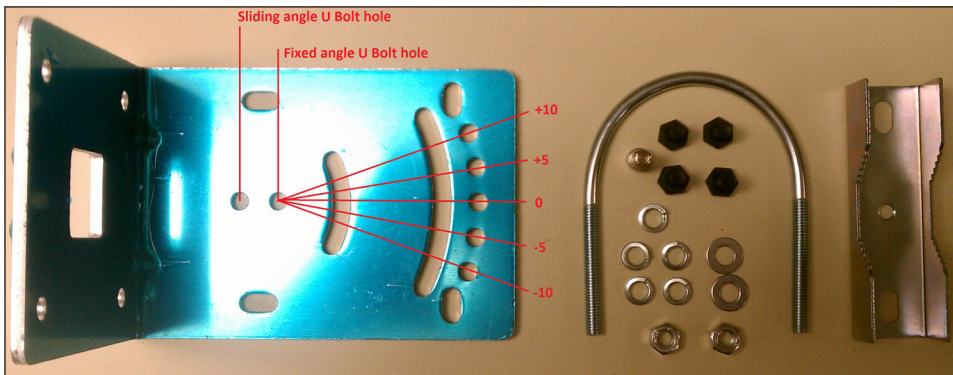
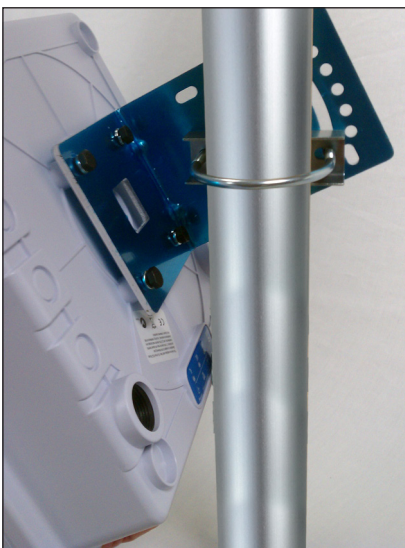
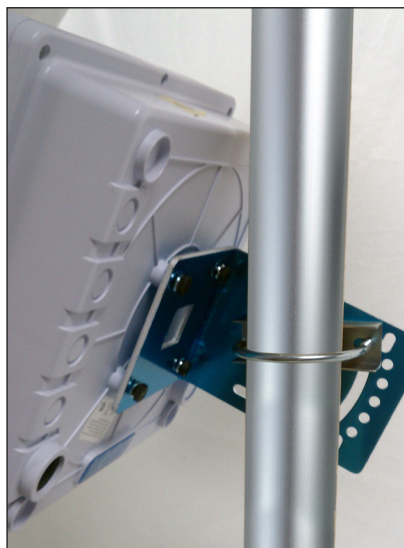
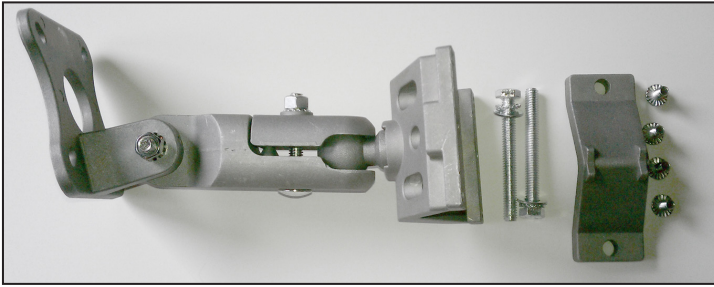
FIGURE 5 - POLE MOUNT INSTRUCTIONS**Included Hardware****Vertical Mount in -45° Position****Vertical Mount in +45° Position**

FIGURE 6 - OPTIONAL POLE/WALL MOUNT HARDWARE*ComNet Part NWBKT1***INSTALLATION REQUIREMENTS**

Shielded outdoor CAT 5 or better should be used for all out of plant Ethernet connection and should be properly grounded through the PoE AC ground. Industrial grade shielded Ethernet cable is recommended to help prevent ESD damage commonly experienced with outdoor installations. Visit www.comnet.net/comnet-products/cables

CONFIGURING NETWAVE

1. Connect an Ethernet cable from the port labelled as IN on the power Injection Module to either a laptop or a PC LAN port.
2. Connect the second Ethernet cable from the OUT port on the Power Injection Module to the NetWave port 1.
3. Apply mains power 90 - 240 VAC to the Power Injection Module with the provided power cord. You should notice the green LED illuminate in the Power Injection Module and the power LED on the NetWave unit.
4. Set the IP address of the laptop being used to configure NetWave to static and the subnet to 192.168.10.x/24 subnet.
5. Point the browser to 192.168.10.102. This is the default address.
6. A login prompt will pop up. Enter:
ID: **admin**
Password: **admin**

7. Select the NETWORK SETTINGS tab and set the desired network settings.

Select Apply Settings

Select Save

NOTE: This will be the network address for the NetWave web server. It is not necessary to set to the same subnet as the operating network but it is recommended.

- 8 Select the WIRELESS SETTINGS tab and set:


- Wireless mode - Set to AP or Client
- Country code - Only required if setting up the NW8E (ETSI) model

NOTE: It is the user's responsibility to ensure that the correct country is chosen. ComNet accepts no liability for incorrectly set up equipment.


- Output RF power - if RSSI is greater than 70, it is recommended to reduce RF TX power at the connected remote node.
- Set SSID - if changing from the default setting
- Channel Spectrum Width - May want to reduce to 20M (or 10M) from the default 20/40M if the 5GHz spectrum is crowded or connections across the link are unstable.
- Wireless Security - if changing from default settings
- Select Apply Settings
- Select Save

The diagram illustrates three different PoE+ network topologies for NW8 and NWADA1 devices:

- Top Topology:** A NW8 device is connected to a PoE Camera via Ethernet. The NW8 provides PoE+ to the camera. A CNGE1IPS or any PSE device is connected to the NW8 via PoE+.
- Middle Topology:** A ComNet Gigabit Managed Switch providing 30W PoE is connected to a NW8 (Access Point) via 1Gbps Ethernet. The switch provides PoE to the NW8. The NW8 is connected to an NWADA1 External Directional Antenna.
- Bottom Topology:** A ComNet Gigabit Managed Switch providing 30W PoE is connected to a NW8 device via Ethernet. The switch provides PoE+ to the NW8. The NW8 is connected to an NWADA1 External Directional Antenna. A CNGE1IPS or any PSE device is connected to the NW8 via PoE+.

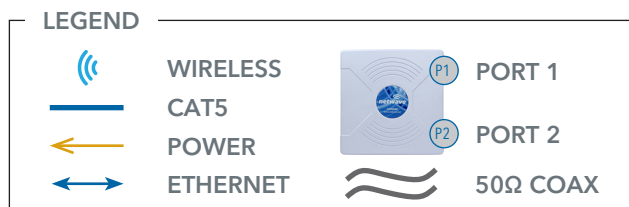

TYPICAL DROP-AND-REPEAT TOPOLOGY APPLICATION

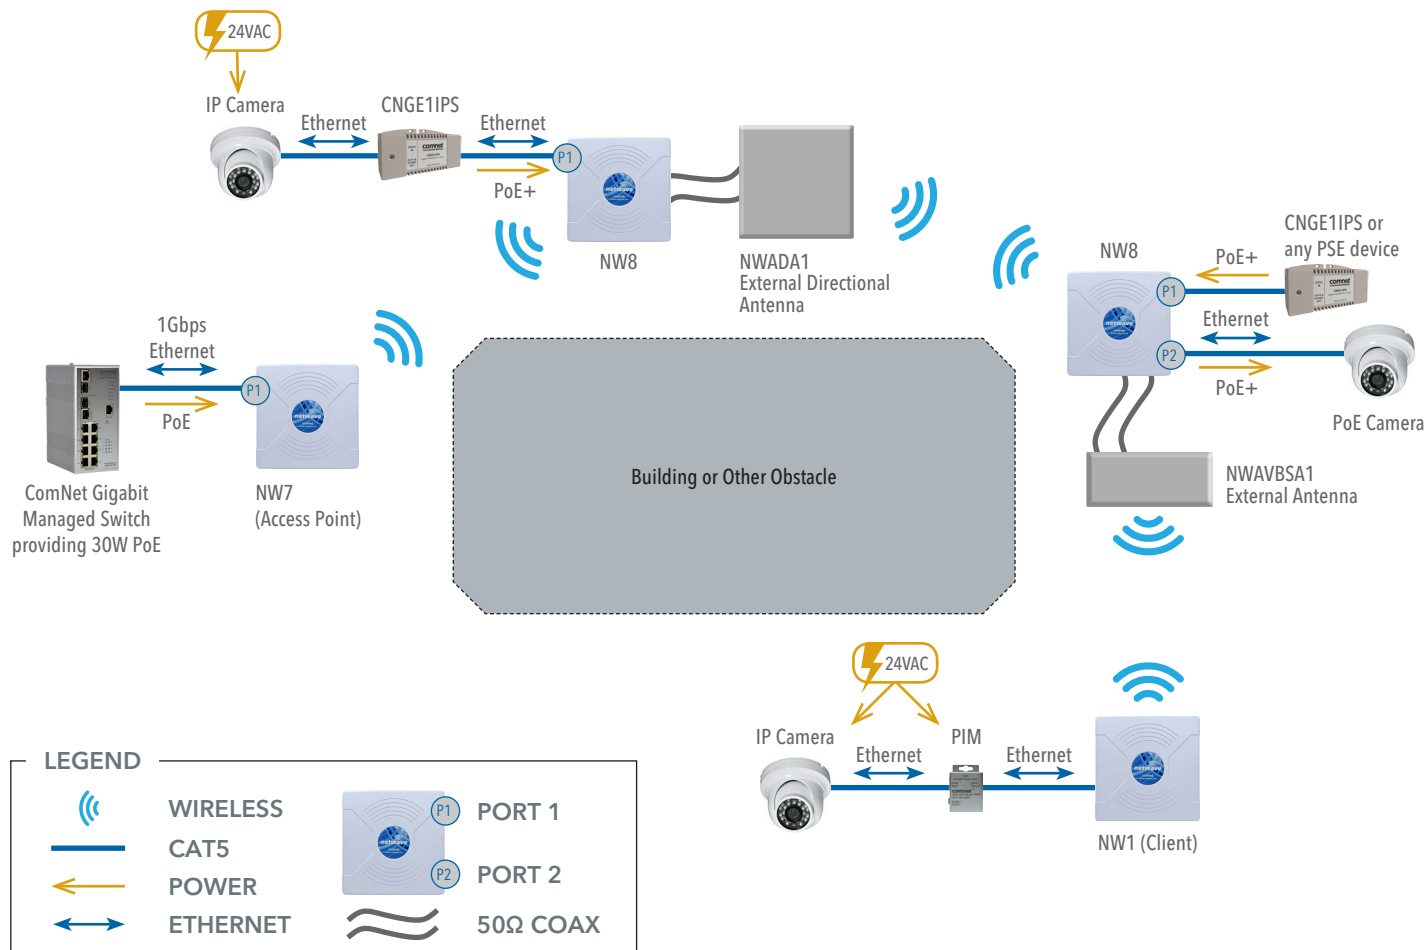

DEFAULT CONFIGURATIONS

IP Address of Web Server	192.168.10.102
LAN Mode for Web Server	Static Addressing
Web Server User ID	admin
Web Server Password	admin
Web Server Guest User ID	guest
Webserver Guest Password	guest
SSID	NetWave-1
WPA Pre-shared Key	12345678
Channel-Frequency (AP)	Auto
Channel Spectrum Width	20/40M
Long Range Parameters	Enabled and defaulted to 1000m
STP	Disabled

NOTE: A Reset to defaults (performed on the ADMIN page) will erase all user configurations.

AGENCY COMPLIANCE

FCC

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operations of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Industry Canada

This Class A digital apparatus complies with Canadian ICES-003. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (EIRP) is not more than that permitted for successful communication. This device complies with Industry Canada license-exempt RSS standard(s).

Operation is subject to the following two conditions:

- This device may not cause interference, and
- This device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil numérique de la classe A est conforme à la norme NMB-003 Canada. Pour réduire le risque d'interférence aux autres utilisateurs, le type d'antenne et son gain doivent être choisis de façon que la puissance isotrope rayonnée équivalente (PIRE) ne dépasse pas ce qui est nécessaire

pour une communication réussie. Cet appareil est conforme à la norme RSS Industrie Canada exempts de licence norme(s). Son fonctionnement est soumis aux deux conditions suivantes:

17 Compliance

- Cet appareil ne peut pas provoquer d'interférences et
- Cet appareil doit accepter toute interférence, y compris les interférences qui peuvent causer un mauvais fonctionnement du dispositif.

RF Exposure Warning

The antennas used for this transmitter must be installed to provide a separation distance of at least 2.52m from all persons and must not be located or operating in conjunction with any other antenna or transmitter.

Les antennes utilisées pour ce transmetteur doivent être installées en considérant une distance de séparation de toute personnes d'au moins 2.52m et ne doivent pas être localisées ou utilisées en conflit avec tout autre antenne ou transmetteur.

CE Marking

CE marking on this product represents the product is in compliance with all directives that are applicable to it.

This equipment may be operated in the following countries:

Austria, Belgium, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Ireland, Italy, Latvia, Lithuania, Malta, Netherlands, Norway, Portugal, Romania, Czech Republic, Croatia, Slovakia, Slovenia, Sweden, UK

Installer Compliance Responsibility

Devices must be professionally installed and it is the professional installer's responsibility to make sure the device is operated within local country regulatory requirements.

RoHS/WEEE Compliance Statement

European Directive 2002/96/EC requires that the equipment bearing this symbol on the product and/or its packaging must not be disposed of with unsorted municipal waste. The symbol indicates that this product should be disposed of separately from regular household waste streams. It is your responsibility to dispose of this and other electric and electronic equipment via designated collection facilities appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. For more detailed information about the disposal of your old equipment, please contact your local authorities, waste disposal service, or the shop where you purchased the product.

Need Additional Assistance?

Visit our website <http://www.comnet.net> or contact Comnet tech support:

Tel: (203) 796-5300

Toll free: (888) 678-9427

Email: techsupport@comnet.net

Additional Technical support contact details can be found at:

<http://www.comnet.net/services/technical-support.html>

Or Visit our pre-sales design center:

<http://www.comnet.net/services/design-center.html>

Or our customer care:

<http://www.comnet.net/services/customer-care.html>

Additional Downloads

Datasheets, Installation manuals and other product documentation can be found at:

<http://www.comnet.net/comnet-products/ethernet/wireless/>



3 CORPORATE DRIVE | DANBURY, CT 06810 | USA

T: 203.796.5300 | F: 203.796.5303 | TECH SUPPORT: 1.888.678.9427 | INFO@COMNET.NET

8 TURNBERRY PARK ROAD | GILDERSOME | MORLEY | LEEDS, UK LS27 7LE

T: +44 (0)113 307 6400 | F: +44 (0)113 253 7462 | INFO-EUROPE@COMNET.NET